



RNAV (GPS) RWY 27
PALATKA MUNI/LT KAY LARKIN FLD (28J)

NA Baro-VNAV NA when using St. Augustine altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 27 helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use St Augustine altimeter setting and increase LPV DA to 419 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 582 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. Circling Rwy 17, 35 NA at night.

MISSED APPROACH:
Climb to 3000 direct
FIKUK and hold.
Continue climb-in-hold
to 3000.

UNICOM
122.8 (CTAF) **L**

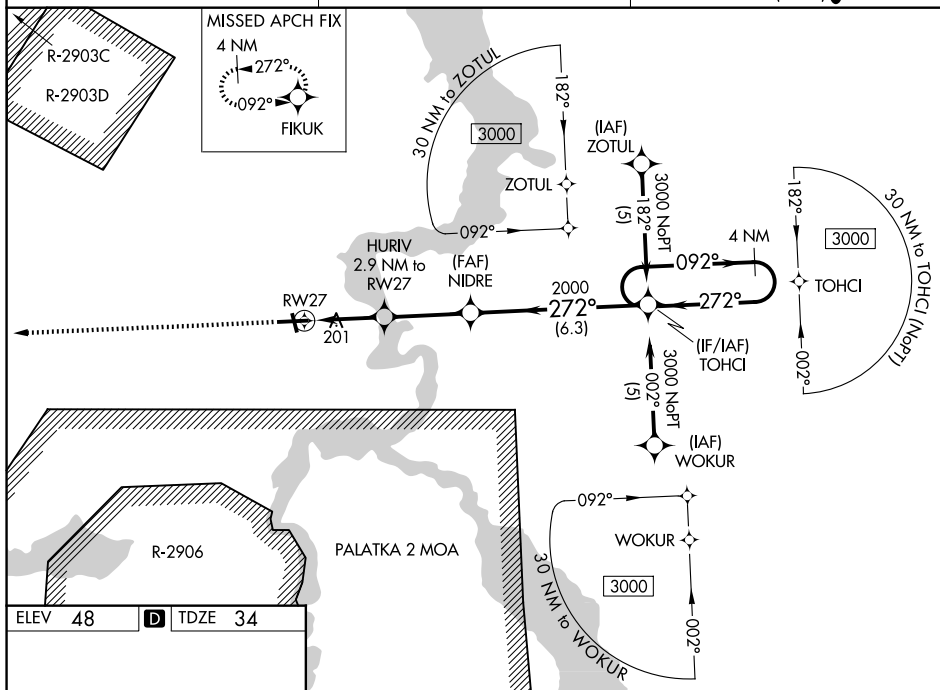

REIL Rwy 9 and 27 **L**
MIRL Rwy 9-27 and 17-35 **L**

29°40'N-81°41'W

PALATKA MUNI/LT KAY LARKIN FLD (28J)
RNAV (GPS) RWY 27