

WAAS CH 97505 W04A	APP CRS 041°	Rwy Ldg TDZE 1496 Apt Elev 1500
--	------------------------	---


RNAV (GPS) RWY 4

JAMESTOWN RGNL (JMS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3300 direct CALOT and hold.

ASOS 118.425	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

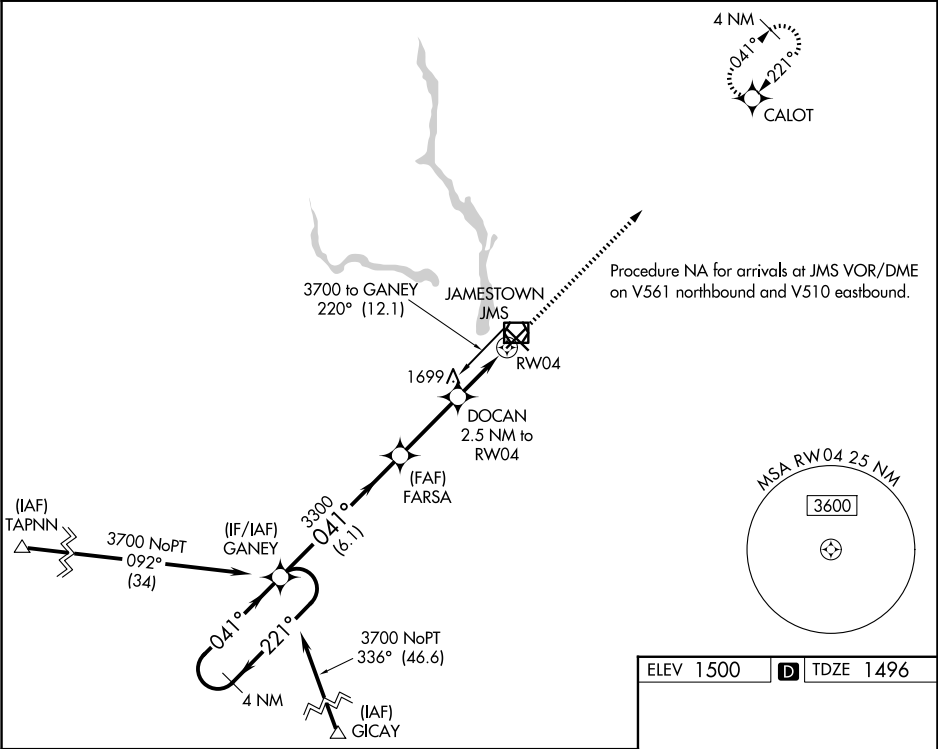

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).		3300	CALOT
3700 ← 221°		→ 041°		*LNAV only	
GP 3.00°		3300		*2340	
TCH 45		6.1 NM		2.9 NM	
CATEGORY		A		B	
LPV DA		1746-1		250 (300-1)	
LNAV/VNAV DA		1930-1½		434 (500-1½)	
LNAV MDA		2000-1 504 (500-1)		2000-1½ 504 (500-1½)	
CIRCLING		2000-1 500 (500-1)		2000-1½ 500 (500-1½)	

ELEV 1500 **D** TDZE 1496

13

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

MIRL Rwy 4-22 0
HIRL Rwy 13-31 0
REIL Rwy 4, 13, and 22 0