

WAAS CH 70405 W18A	APP CRS 185°	Rwy Ldg TDZE Apt Elev	6499 813 813
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

FINDLAY (F'DY)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Baro-VNAV and VDP NA when using Lima Allen County altimeter setting. When local altimeter setting not received, use Lima Allen County altimeter setting: increase all DAs/MDAs 80 feet; increase LNAV Cat C/D and Circling Cat C/D visibility ¼ SM. Circling Rwy 7 NA at night.

MISSED APPROACH:
Climb to 2600 direct KASPE and hold.

ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.725 (CTAF) 0
-----------------------	---------------------------------------	-----------------------------------

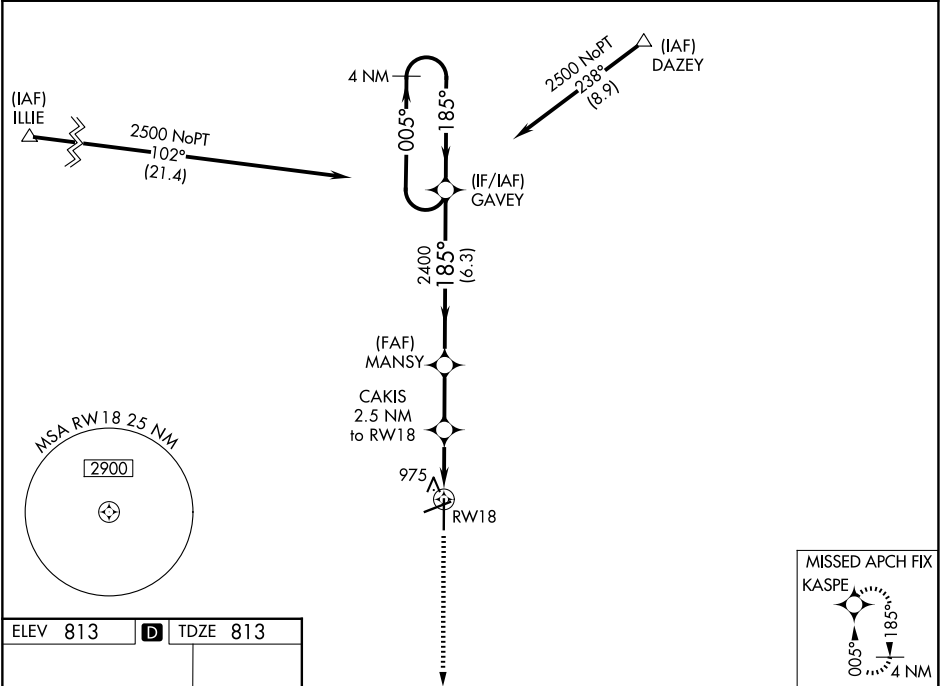

ELEV 813 TDZE 813

MIRL Rwy 7-25
HIRL Rwy 18-36
REIL Rws 7, 25 and 36

2600 ↑ KASPE ✦		GAVEY 4 NM Holding Pattern			
*LNAV only		CAKIS 2.5 NM to RW18	MANSY 2400	005°→ ←185° 2500	
*1.4 NM to RW18		*1640		2400	
RW18		GP 3.00° TCH 43			
1.4 NM		1.1 NM	2.3 NM	6.3 NM	
CATEGORY		A	B	C	D
LPV DA	1063-1 250 (300-1)				
LNAV/ VNAV DA	1320-1¾ 507 (600-1¾)				
LNAV MDA	1300-1 487 (500-1)		1300-1⅜ 487 (500-1⅜)		1300-1½ 487 (500-1½)
CIRCLING	1440-1 627 (700-1)		1440-1¾ 627 (700-1¾)		1540-2¼ 727 (800-2¼)

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026