

APP CRS	Rwy Ldg	4558
074°	TDZE	810
	Apt Elev	813

RNAV (GPS) RWY 7

FINDLAY (F'DY)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using Lima Allen County altimeter setting. Rwy 7 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Lima altimeter setting and increase LNAV/VNAV DA to 1391 feet and all visibilities ¾ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. Straight-In Rwy 7 NA at night, Circling Rwy 7 NA at night.

MISSED APPROACH:
Climb to 2500 direct
DOYET and hold.

ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.725 (CTAF) 0
----------------	--------------------------------	----------------------------

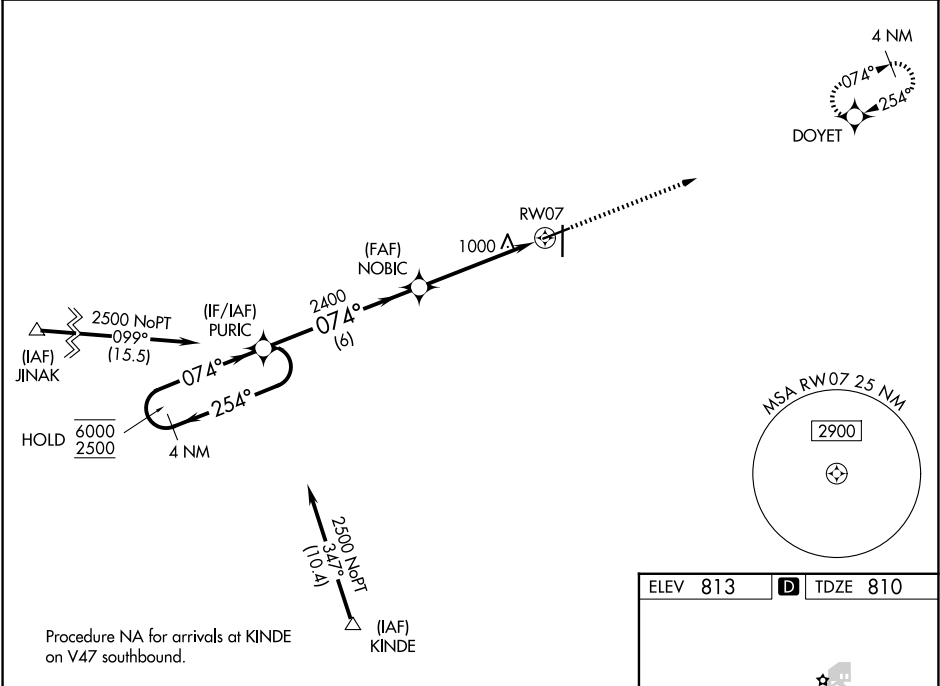

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 23).

2500 DOYET

GP 3.00° TCH 39

6000 2500

254° 074°

PURIC

NOBIC

2400

1.4 NM to RWY 07

RWY 07

6 NM 3.5 NM 1.4

CATEGORY	A	B	C	D
LNAV/VNAV DA	1311-1¾ 501 (500-1¾)			
LNAV MDA	1260-1	450 (500-1)	1260-1¾	450 (500-1¾)
CIRCLING	1440-1	627 (700-1)	1440-1¾	1540-2¼
		627 (700-1¾)	727 (800-2¼)	

ELEV 813 TDZE 810

MIRL Rwy 7-25 0

HIRL Rwy 18-36 0

REIL Rws 7, 25 and 36 0

EC-2, 06 AUG 2026 to 03 SEP 2026

EC-2, 06 AUG 2026 to 03 SEP 2026