

WAAS
CH **78216**
W18A

APP CRS
182°

Rwy Ldg
TDZE
Apt Elev
8000
407
407

RNAV (GPS) RWY 18


OWENSBORO/DAVIESS COUNTY RGNL (OWB)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Evansville altimeter setting: increase LPV DA to 666 feet; increase LNAV/VNAV DA to 1204 feet and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D visibility ½ mile and Circling Cats C/D visibility ¼ mile. Baro-VNAV and VDP NA when using Evansville altimeter setting.

MISSED APPROACH:
Climb to 3000 direct ECOCO and hold.

AWOS-3PT 119.025	EVANSVILLE APP CON ★ 124.025 290.9	OWENSBORO TOWER ★ 120.7 (CTAF) 0 251.15	GND CON 121.7	UNICOM 122.95
----------------------------	--	---	-------------------------	-------------------------

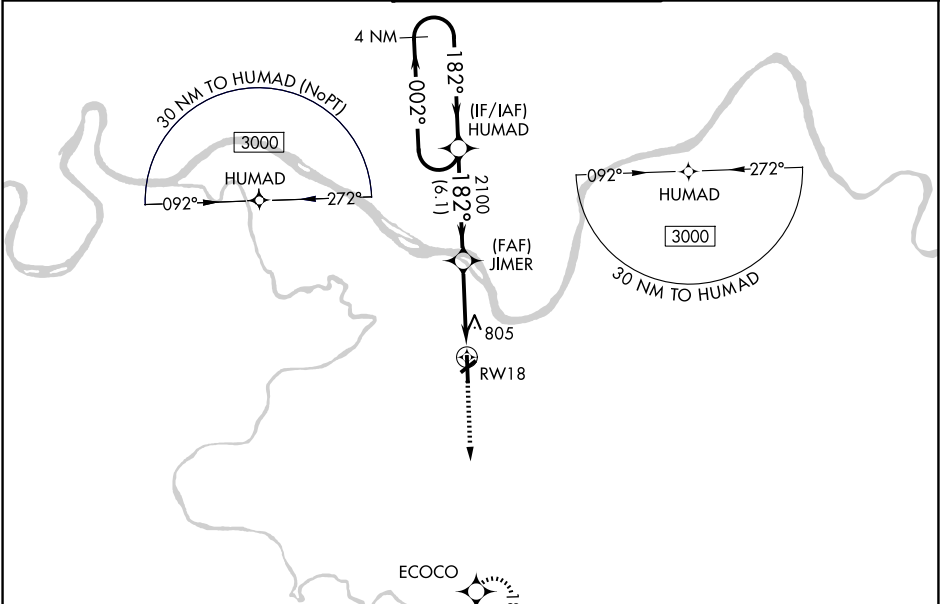

4 NM Holding Pattern 3000 ←002° 182°→ HUMAD 182°→ 2100 GP 3.00° TCH 52 3000 ↑ ECOCO JIMER 2100 *1.9 NM to RW18 RW18 *LNAV only. 6.1 NM 3.3 NM 1.9					ELEV 407 D TDZE 407 182° 81 8000 X 150 5000 X 100 TWR 36 AS MIRL Rwy 6-24 HIRL Rwy 18-36 REIL Rws 6, 18, and 24				
CATEGORY	A	B	C	D					
LPV DA	607-¾ 200 (200-¾)								
LNAV/VNAV DA	1145-2½ 738 (800-2½)								
LNAV MDA	1060-1	653 (700-1)	1060-1⅞ 653 (700-1⅞)						
CIRCLING	1060-1 653 (700-1)	1120-1 713 (800-1)	1140-2 733 (800-2)	1140-2¼ 733 (800-2¼)					