

WAAS CH 70627 W12A	APP CRS 120°	Rwy Ldg TDZE 680 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 12

DECATUR (DEC)

RNP APCH - GPS.


▼

▲

Procedure NA at night. Rwy 12 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Lincoln altimeter setting and increase all MDA 80 feet, increase LP Cat C and D visibility ¼ SM, LNAV Cat C and D visibility ⅓ SM, and Circling Cat C and D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct ZOBSE and hold.

ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9 (CTAF) 0 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	---	----------------------------------	-------------------------

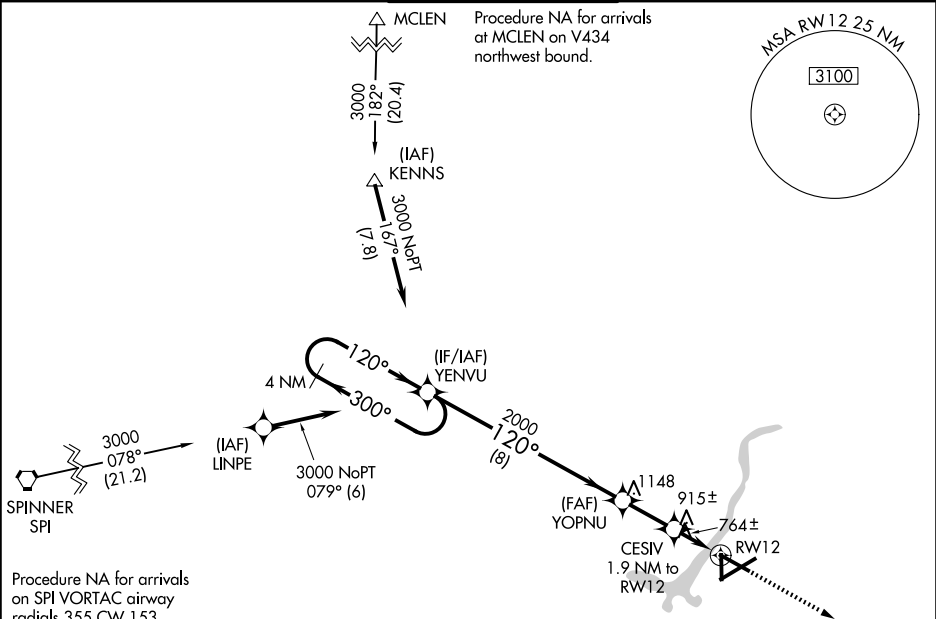

MISSED APCH FIX
ZOBSE
120°
300°
4 NM

ELEV 682 TDZE 680

4 NM Holding Pattern
YENVU
3000
300°
120°
YOPNU
CESIV 1.9 NM to RW12
3.00° TCH 45
2000
1320
RW12
8 NM
2.1 NM
1.9 NM

3000 ZOBSE
120°
TWR
5228 X 150
8496 X 150
36
6799 X 150
42
30

CATEGORY	A	B	C	D
LP MDA	1020-1 340 (400-1)			
LNAV MDA	1180-1 500 (500-1)	1180-1⅓ 500 (500-1⅓)		
CIRCLING	1200-1 518 (600-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2¼ 678 (700-2¼)

HIRL Rwy 6-24
MIRL Rwy 12-30 and 18-36

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026