


WAAS CH 45738 W36A	APP CRS 360°	Rwy Ldg TDZE 678 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 36
DECATUR (DEC)

RNP APCH.		MISSED APPROACH: Climb to 3100 direct HEPAX and hold.		
Baro-VNAV and VDP NA when using Lincoln altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. When local altimeter setting not received, use Lincoln altimeter setting and increase all DA/MDA 80 feet, increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cat C/D and Circling Cat C/D visibility ¾ SM.				
ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9(CTAF) 0 291.775	GND CON 121.75 291.775	UNICOM 122.95

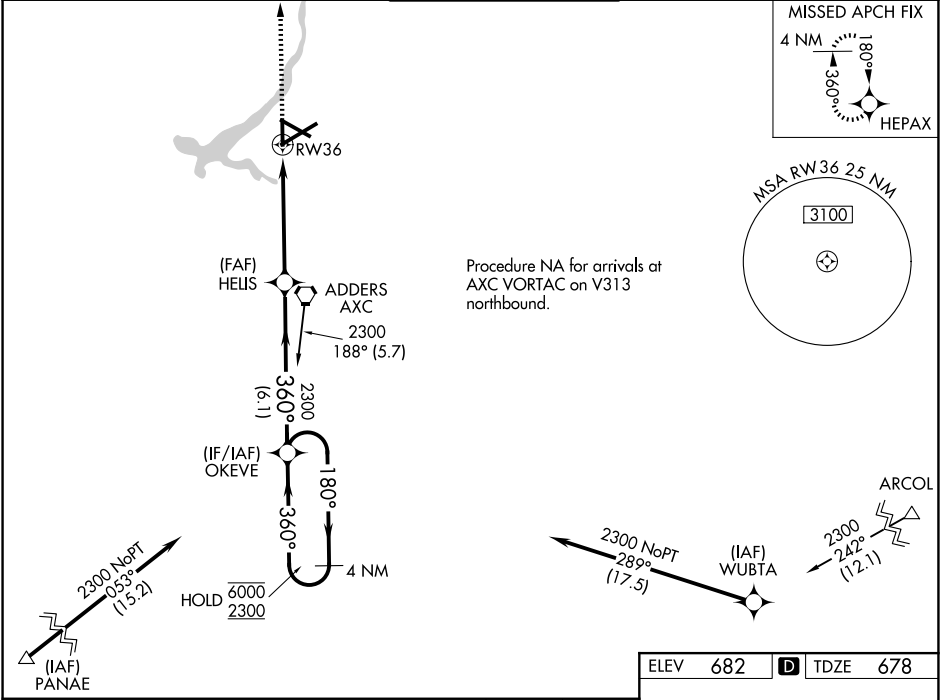

4 NM Holding Pattern		OKEVE	HELIS	3100	HEPAX
6000		180°	360°	2300	*LNAV only
2300		360°	2300	2300	
GP 3.00°					
TCH 58					
		6.1 NM	3.5 NM	1.4 NM	
CATEGORY	A	B	C	D	
LPV DA	984-7/8		306 (400-7/8)		
LNAV/VNAV DA	1082-1 1/8		404 (400-1 1/8)		
LNAV MDA	1180-1	502 (500-1)	1180-1 3/8	502 (500-1 3/8)	
CIRCLING	1180-1	1240-1	1360-2	1360-2 1/4	
	498 (500-1)	558 (600-1)	678 (700-2)	678 (700-2 1/4)	

