

WAAS CH 65799 W06A	APP CRS 057°	Rwy Ldg 5000 TDZE 1212 Apt Elev 1212
--	------------------------	---



RNAV (GPS) RWY 6
LONDON/CORBIN/MAGEE (L07)

RNP APCH.

▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use Somerset altimeter setting; increase LPV DA to 1566 feet and visibility all Cats $\frac{1}{2}$ SM; increase LNAV/VNAV DA to 1702 feet and visibility all Cats $\frac{1}{2}$ SM; increase all MDAs 100 feet and LNAV Cat C visibility $\frac{1}{4}$ SM, Cat D visibility $\frac{1}{2}$ SM, and Circling Cat C/D visibility $\frac{1}{4}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17° C or above 46° C. Baro-VNAV and VDP NA when using Somerset altimeter setting.

MISSED APPROACH:
Climb to 3900 direct
ODUBE and hold.

ASOS	INDIANAPOLIS CENTER	UNICOM
119.075	124.625 371.925	123.0 (CTAF) L

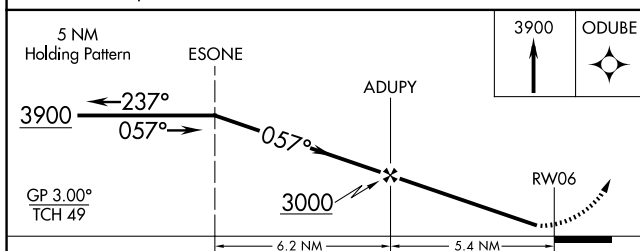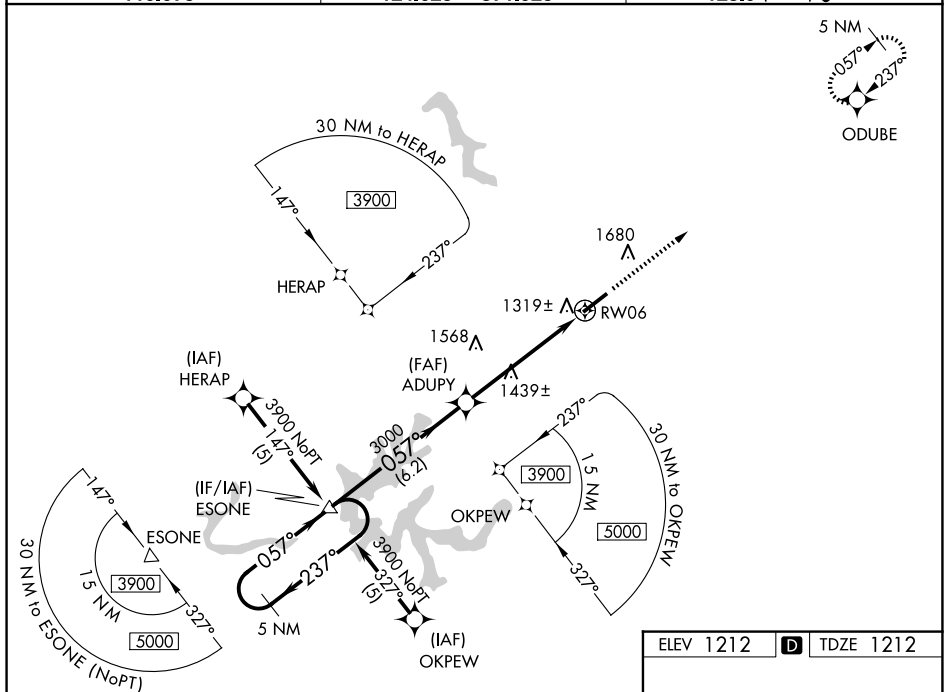

CATEGORY	A	B	C	D
LPV DA	1466-1 254 (300-1)			
LNAV/ VNAV DA	1602-1¼ 390 (400-1¼)			
LNAV MDA	1720-1 508 (600-1)		1720-1½ 508 (600-1½)	
CIRCLING	1780-1 568 (600-1)	2040-1¼ 828 (900-1¼)	2040-2½ 828 (900-2½)	2040-2¾ 828 (900-2¾)

