


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using FLD altimeter setting. Circling Rwy 5, 13, 23, 31 NA at night. When local altimeter setting not received, use FLD altimeter setting and increase LPV DA to 1077 feet, LNAV/VNAV DA to 1155 feet, and all MDAs 40 feet; increase LPV visibility all Cats 1/8 SM, LNAV visibility Cats C and D 1/4 SM, and Circling visibility Cat D 1/4 SM.

MISSED APPROACH:
Climb to 2800 direct
DOCEN and hold.

ATIS 125.9	MILWAUKEE APP CON 127.0 263.075	OSHKOSH TOWER ★ 118.5(CTAF) 290.9	GND CON 132.3	UNICOM 122.95
---------------	------------------------------------	--------------------------------------	------------------	------------------

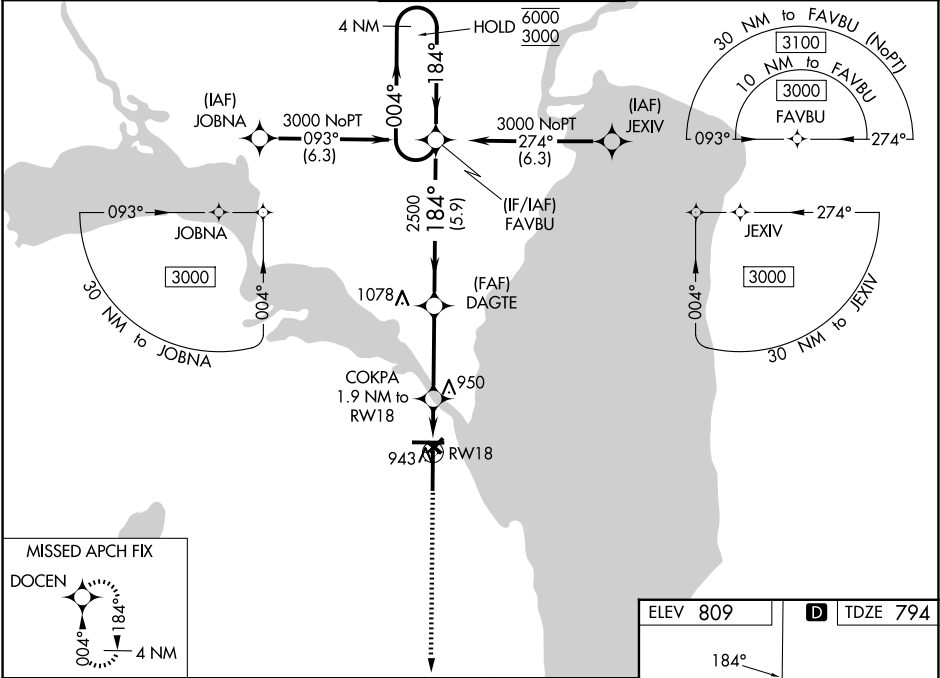

4 NM Holding Pattern		FAVBU	DAGTE	COKPA	2800	DOCEN
6000 3000		2500	1440	1.1 NM to RWY 18	1.1 NM to RWY 18	
GP 3.00° TCH 47		5.9 NM	3.3 NM	0.8 NM	1.1 NM	
CATEGORY	A	B	C	D		
LPV DA	1044-3/4		250 (300-3/4)			
LNAV/VNAV DA	1122-1		328 (400-1)			
LNAV MDA	1200-1	406 (400-1)	1200-1 1/8	406 (400-1 1/8)		
CIRCLING	1280-1 471 (500-1)	1300-1 491 (500-1)	1360-1 1/2 551 (600-1 1/2)	1440-2 631 (700-2)		

ELEV 809

D

TDZE 794

184°

6179 X 150

81

8002 X 150

0.3% DOWN

36

TWR

REIL Rwy 18 and 27

HIRL Rwy 9-27 and 18-36