

APP CRS
129°

Rwy Ldg
TDZE
1723

Apt Elev
1723

RNAV (GPS) RWY 13

CHAUTAUQUA COUNTY/JAMESTOWN (JHW)

RNP APCH-GPS.


▼

NA

Rwy 13 Straight-in/Circling and Circling to Rwy 31 NA at night. When local altimeter setting not received, use Dunkirk altimeter setting: increase all MDAs 200 feet and visibility LNAV Cat C/D and Circling Cat C ½ SM and Circling Cat D ¾ SM. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 4000 direct
GOSPL WP and hold.

AWOS-3PT 118.425	BUFFALO APP CON ★ 126.05	UNICOM 122.975 (CTAF) 1
---------------------	-----------------------------	----------------------------

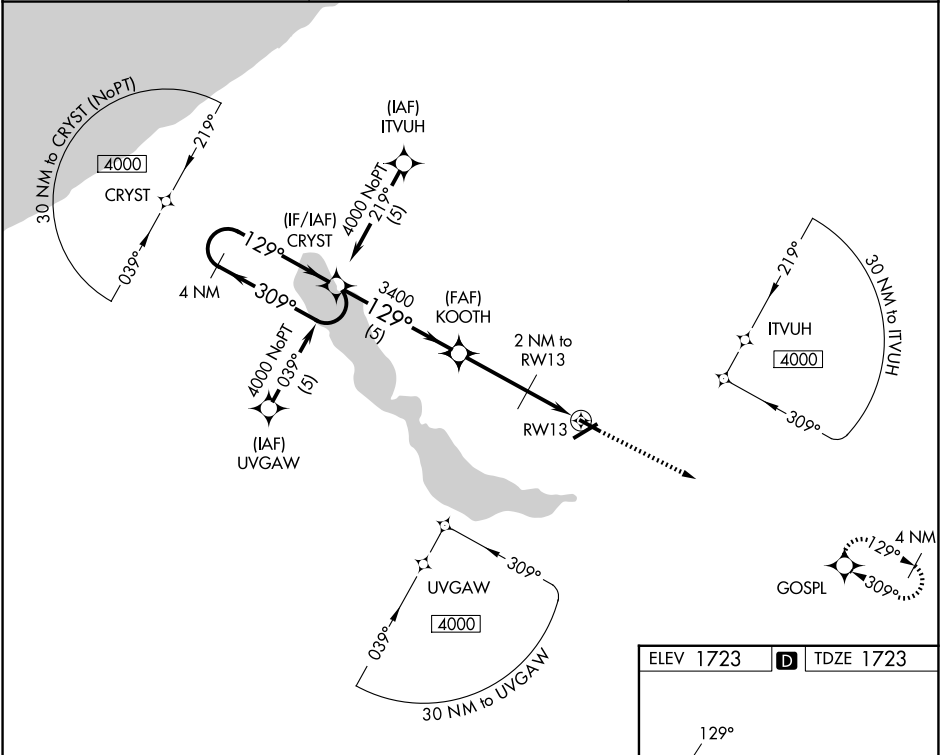

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 45).				4000	GOSPL
4 NM Holding Pattern				CRYST	
KOOOTH				3400	
2 NM to RW13				RW13	
5 NM				3 NM	2 NM
CATEGORY	A	B	C	D	
LNAV MDA	2140-1	417 (500-1)	2140-1¼	417 (500-1¼)	
CIRCLING	2200-1	477 (500-1)	2260-1½ 537 (600-1½)	2340-2 617 (700-2)	

ELEV 1723

TDZE 1723

129°

4499 X 100

5300 X 100

0.4% UP

13

13

13

REIL Rwy 31 1

MIRL Rwy 13-31 1

HIRL Rwy 7-25 1