

WAAS CH 72737 W17A	APP CRS 175°	Rwy Ldg TDZE 1291 Apt Elev 1300
--	------------------------	---

RNAV (GPS) RWY 17L

WILEY POST (PWA)

RNP APCH-GPS.

▼

▲



ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 3400 direct BISKT and hold.

ATIS 128.725	OKE CITY APP CON 124.6 266.8	WILEY POST TOWER ★ 126.9 (CTAF) 0 306.9	GND CON 121.7	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

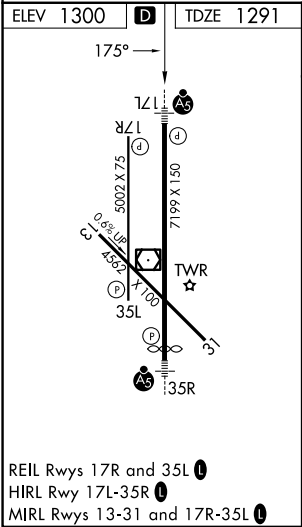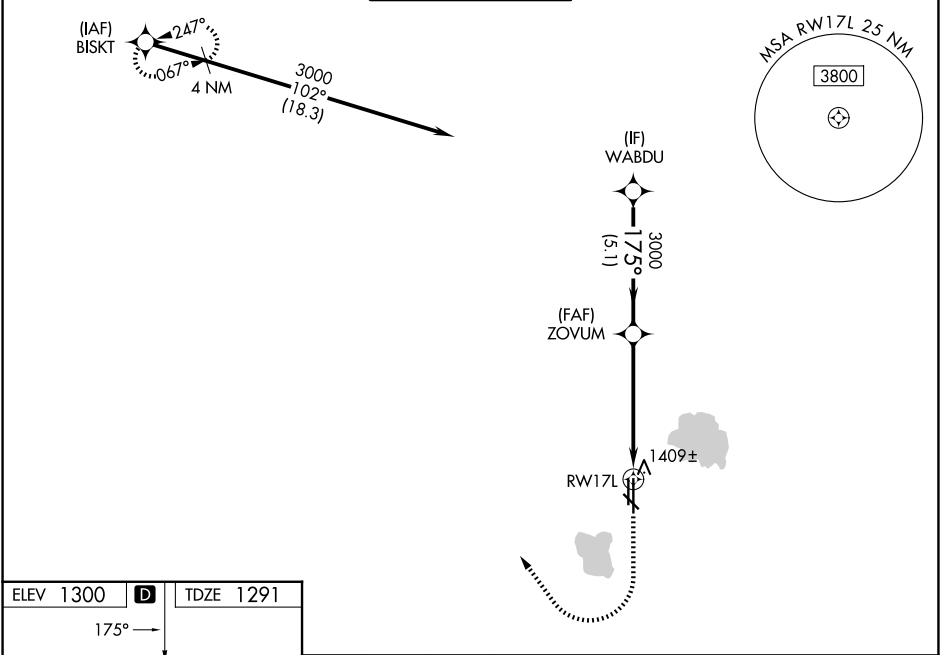

	1700	3400	BISKT	
			ZOYUM	WABDU
			3000	3000
			175°	3000
			3000	
			GP 3.00°	TCH 54
			1 NM	4.2 NM
			5.1 NM	
CATEGORY	A	B	C	D
LPV DA	1491-½ 200 (200-½)			
LNAV/VNAV DA	1590-½ 299 (300-½)			
LNAV MDA	1660-½	369 (400-½)	1660-⅝	369 (400-⅝)
CIRCLING	1780-1	480 (500-1)	1880-1½ 580 (600-1½)	1880-2 580 (600-2)