


LOC/DME I-UDL 110.7 Chan 44	APP CRS 276°	Rwy Ldg TDZE Apt Elev 8394 7 65
---	------------------------	---


ILS or LOC RWY 28R
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

DME or RADAR required. RNP APCH - GPS from CRNVL.	MALSR 	MISSED APPROACH: Climb to 800 then climbing right turn to 4000 on FLL VOR/DME R-305 to HUKUK INT/FLL 15 DME and hold, continue climb-in-hold to 4000.
 Simultaneous approach authorized. Inop table does not apply to S-ILS 28R. For inop ALS, increase S-LOC 28R Cats C and D visibility to 1 3/8 SM.		

D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4
------------------------	---------------------------------------	---	-------------------------

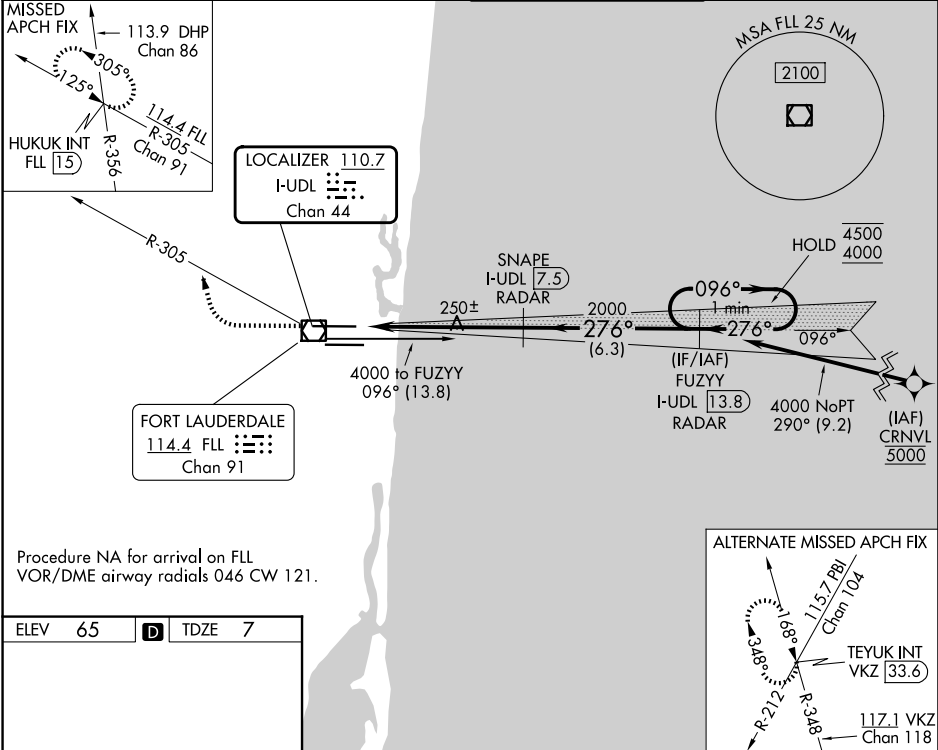

ELEV 65	D	TDZE 7
---------	---	--------

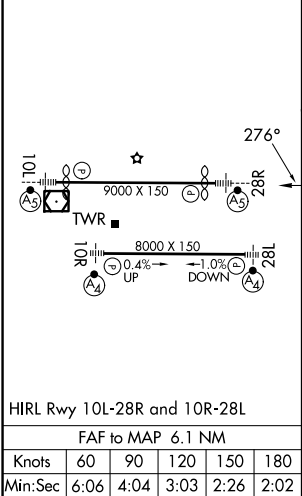

800 ↑	4000 ↗ FLL R-305	HUKUK INT	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 69).		FUZZY I-UDL 13.8 RADAR	One Minute Holding Pattern
			SNAPE I-UDL 7.5 RADAR	I-UDL 2.8	2000	096° → 4500 ← 276° 4000
			I-UDL 1.4	2000	276°	GS 3.00° TCH 49
			1.4 NM	4.7 NM	6.3 NM	
CATEGORY	A		B	C	D	
S-ILS 28R	257/40					250 (200-¾)
S-LOC 28R	520/24	513 (500-½)		520/55	513 (500-1)	
CIRCLING	680-1	615 (700-1)		800-2 735 (800-2)	800-2¼ 735 (800-2¼)	

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026