

LOC/DME I-HUM

110.5

Chan 42

APP CRS

042°

Rwy Ldg

8950

TDZE

8

Apt Elev

13

ILS Z RWY 4R


DANIEL K INOUEY INTL (HNL) (PHNL)

From HAURY: RNAV 1-GPS required. DME or RADAR required.
DME or RADAR required for procedure entry.

MALSR

MISSED APPROACH: Climb to 540, Cat E climb to 780 then climbing right turn to 3000 on heading 220° and on HNL VORTAC R-171 to ALANA INT/HNL VORTAC 13.9 DME and hold. * Missed approach requires minimum climb of 318 feet per NM to 1820, (if unable to meet climb gradient use S-ILS 4R minimums).

D-ATIS	HCF APPROACH	HONOLULU TOWER	GND CON
127.9 251.15	118.3 269.0	118.1 257.8 123.9 273.575 (8R/26L)	121.9 348.6

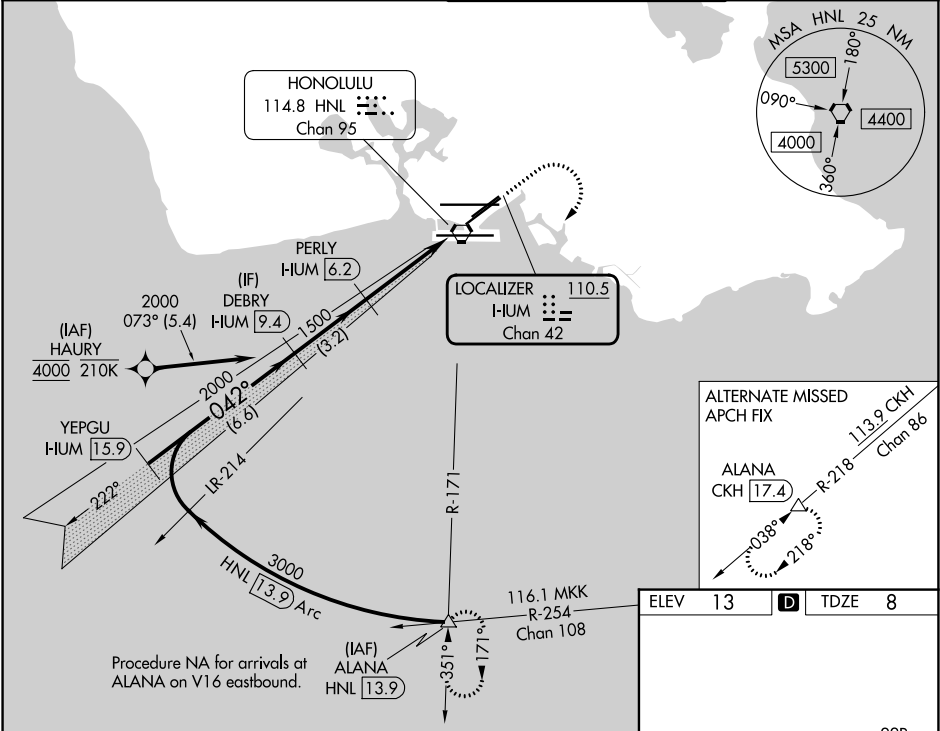

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).					
YEPGU I-HUM 15.9	DEBRY I-HUM 9.4	PERLY I-HUM 6.2	HNL R-171	ALANA	
3000	2000	1500	540	3000	
GS 3.00° TCH 55	042°	1500	hdg 220°		
	6.6 NM	3.2 NM	4.5 NM		
CATEGORY	A	B	C	D	E
S-ILS 4R*		258-½	250 (300-½)		NA
S-ILS 4R		308-½	299 (300-½)		566-1⅞ 557 (600-1⅞)

MIRL Rwy 4L-22R

REIL Rwy 4L, 8R, 22L, 22R, and 26R

HIRL Rwy 4R-22L, 8L-26R, and 8R-26L