
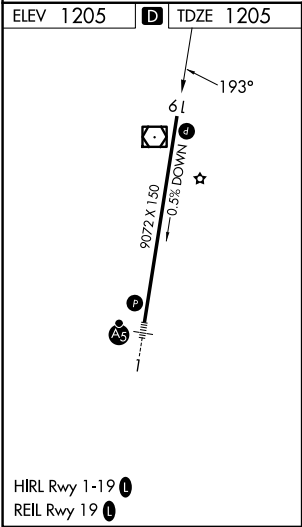


WAAS CH 86616 W19A	APP CRS 193°	Rwy Ldg TDZE Apt Elev	9072 1205 1205
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
MARQUETTE/SAWYER RGNL (SAW)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.			MISSED APPROACH: Climb to 3500 direct EVYIP and hold.	
AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7

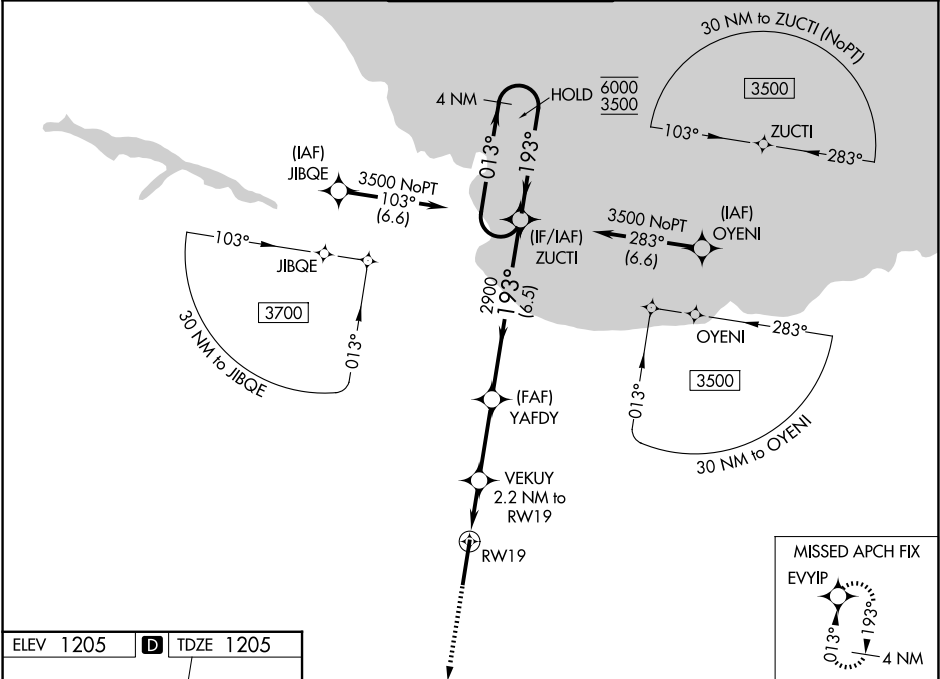

3500

↑

EVIYP

VGSI and RNAV glidepath not coincident
(VGSi Angle 3.00/TCH 53).

4 NM
Holding Pattern

CATEGORY	A	B	C	D
LPV DA	1405- ³ / ₄ 200 (200- ³ / ₄)			
LNAV/ VNAV DA	1522- ⁷ / ₈ 317 (400- ⁷ / ₈)			
LNAV MDA	1620-1	415 (500-1)	1620-1 ¹ / ₈	415 (500-1 ¹ / ₈)
CIRCLING	1680-1	475 (500-1)	1820-1 ³ / ₄ 615 (700-1 ³ / ₄)	1820-2 615 (700-2)