

WAAS CH 56608 W09A	APP CRS 094°	Rwy Ldg TDZE 1016 Apt Elev 1027
--	------------------------	---

RNAV (GPS) Y RWY 9

KANSAS CITY INTL (MCI)

RNP APCH - GPS.


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to RVR 4500, and increase LNAV Cats C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° to LYMES and hold.

D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC
--------------------------	--	--	-------------------------	--------------------------	-------

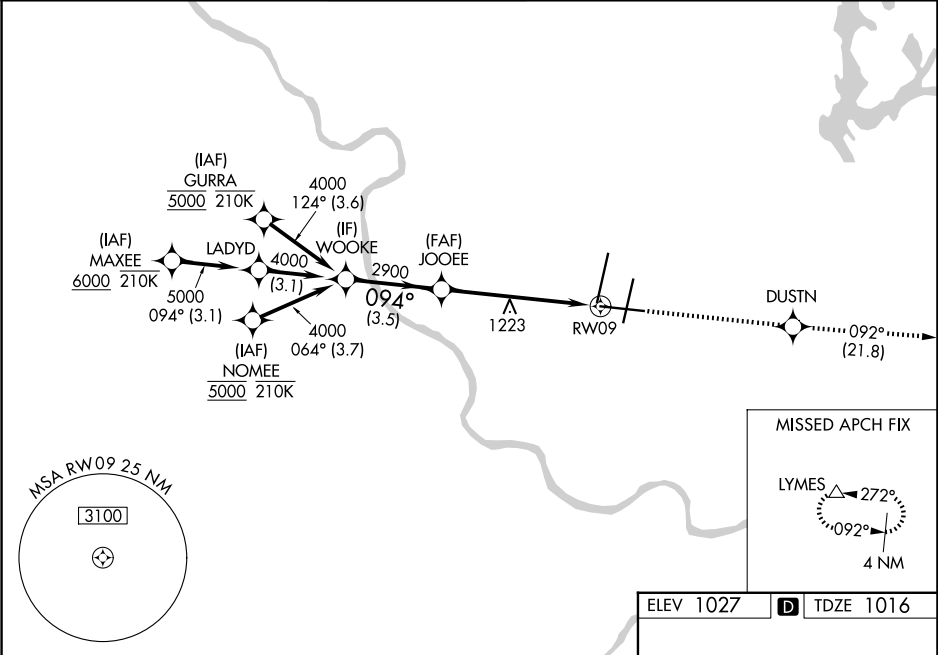

WOOKE		4000		DUSTN		tr 092°		LYMES	
4000		JOOEE		2900					
GP 3.00°				1.3 NM to RW09		RW09			
TCH 56									
		3.5 NM		4.5 NM		1.3 NM			
CATEGORY	A		B		C		D		
LPV DA			1316/40		300 (300-¾)				
LNAV/VNAV DA			1319/40		303 (300-¾)				
LNAV MDA	1480/24		464 (500-½)		1480/50		464 (500-1)		
CIRCLING	1540-1		513 (600-1)		1540-1½		513 (600-1½)		1580-2
									553 (600-2)

HIRL all Rwys

TDZ/CL Rwys 1L, 1R, 19R and 19L