

LOC I-JBD <u>108.95</u>	APP CRS 053°	Rwy Idg 5343 TDZE 124 Apt Elev 125
-----------------------------------	------------------------	---



ILS or LOC RWY 5
LUMBERTON RGNL (LBT)

ADF required.

T When local altimeter setting not received, use Maxton altimeter setting and increase DA to 416 feet and all visibility $\frac{1}{8}$ SM; increase all MDA to 60 feet and S-LOC 5 visibility
A Cat C $\frac{1}{8}$ SM and Circling visibility Cat C $\frac{1}{4}$ SM. Circling Rwy 13, 31 NA at night.
Autopilot coupled approach NA below 1250.

MISSED APPROACH: Climb to 1000 then climbing right turn to 1900 direct JIGEL LOM and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) ①
------------------------	---	---------------------------------

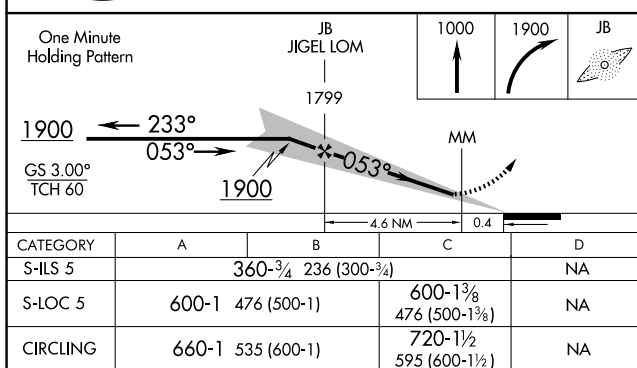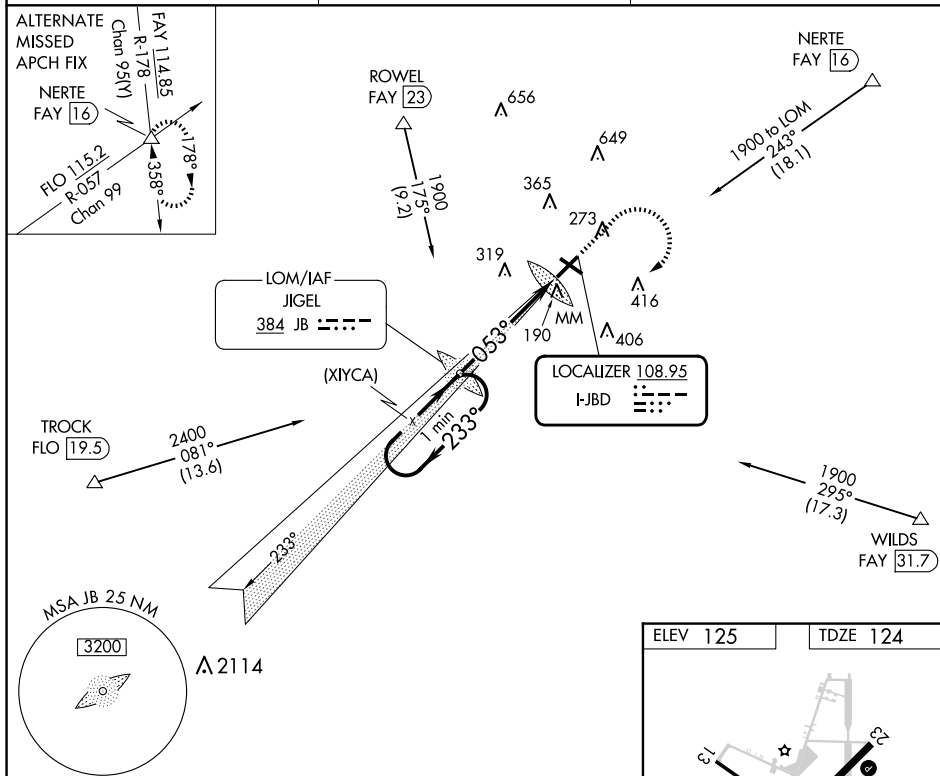

CATEGORY	A	B	C	D
S-ILS 5	360-3/4 236 (300-3/4)			NA
S-LOC 5	600-1	476 (500-1)	600-1 3/8 476 (500-1 3/8)	NA
CIRCLING	660-1	535 (600-1)	720-1 1/2 595 (600-1 1/2)	NA

