

WAAS CH 61100 W13A	APP CRS 131°	Rwy Ldg 9200 TDZE 358 Apt Elev 366
--	------------------------	---

RNAV (GPS) RWY 13
EAST TEXAS RGNL (GGG)

RNP APCH-GPS.


⚠ Baro-VNAV and VDP NA when using Gilmer altimeter setting. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cat E visibility to 1 1/4 SM. When local altimeter setting not received use Gilmer altimeter setting and increase LPV DA to 671 feet; increase LNAV/VNAV DA to 785 feet; increase all MDA 60 feet, and LNAV visibility Cat C to RVR 5000, and Circling visibility Cats C/D/E 1/4 SM. For inop ALS when using Gilmer altimeter setting, increase LPV all Cats visibility to RVR 4500, LNAV/VNAV Cat E visibility to 1 1/4 SM, and LNAV Cats C/D/E visibility to 1 3/8 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MALSR




MISSED APPROACH:
Climb to 3000 direct
FANAL and hold.

ATIS 119.65	LONGVIEW APP CON★ 124.675 257.975	EASTEX TOWER★ 119.2 (CTAF) 1377.05	GND CON 121.6	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

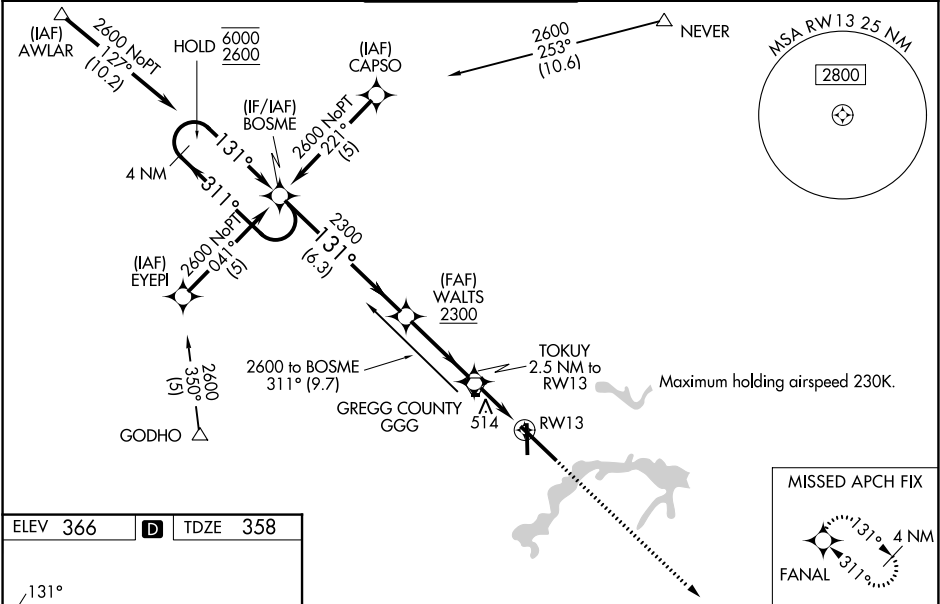

ELEV 366	D	TDZE 358
----------	----------	----------

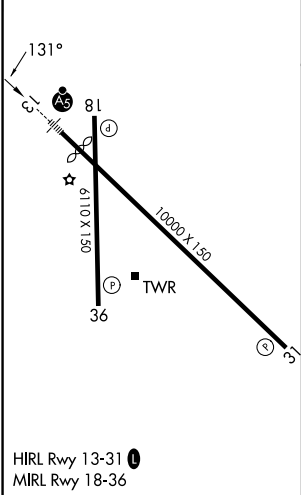

4 NM Holding Pattern		BOSME		WALT		TOKUY		2.5 NM to RW13		1.2 NM to RW13		RW13	
6000 2600		311° 131°		2300		1200							
GP 3.00° TCH 42				6.3 NM		3.4 NM		1.3		1.2 NM			
CATEGORY	A	B	C	D	E								
LPV DA	612/24 254 (300-½)												
LNAV/ VNAV DA	726/40 368 (400-¾)												
LNAV MDA	780/24	422 (500-½)	780/40 422 (500-¾)	780/50	422 (500-1)								
CIRCLING	860-1	494 (500-1)	980-1¾ 614 (700-1¾)	1080-2¼ 714 (800-2¼)	1080-2½ 714 (800-2½)								

SC-2, 06 AUG 2026 to 03 SEP 2026

SC-2, 06 AUG 2026 to 03 SEP 2026