

APP CRS	Rwy Ldg	8003
100°	TDZE	201
	Apt Elev	201

RNAV (GPS) RWY 10

LAKE CITY GATEWAY (LCQ)

RNP APCH - GPS.


▼

▲

Rwy 10 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use GNV altimeter setting and increase all MDAs 100 feet, increase LNAV Cat C/D visibility ¾ SM and Circling Cat C visibility ½ SM and Cat D ¼ SM. Straight-in Rwy 10 NA at night, Circling Rwy 5, 10, 23 NA at night.

MISSED APPROACH: Climb to 700 then climbing right turn to 2000 direct KRKLD and hold.

AWOS-3 120.675	JACKSONVILLE CENTER 125.375 254.325	LAKE CITY TOWER ★ 119.2 (CTAF) 0 314.6	GND CON 121.9	UNICOM 122.95
-------------------	--	---	------------------	------------------

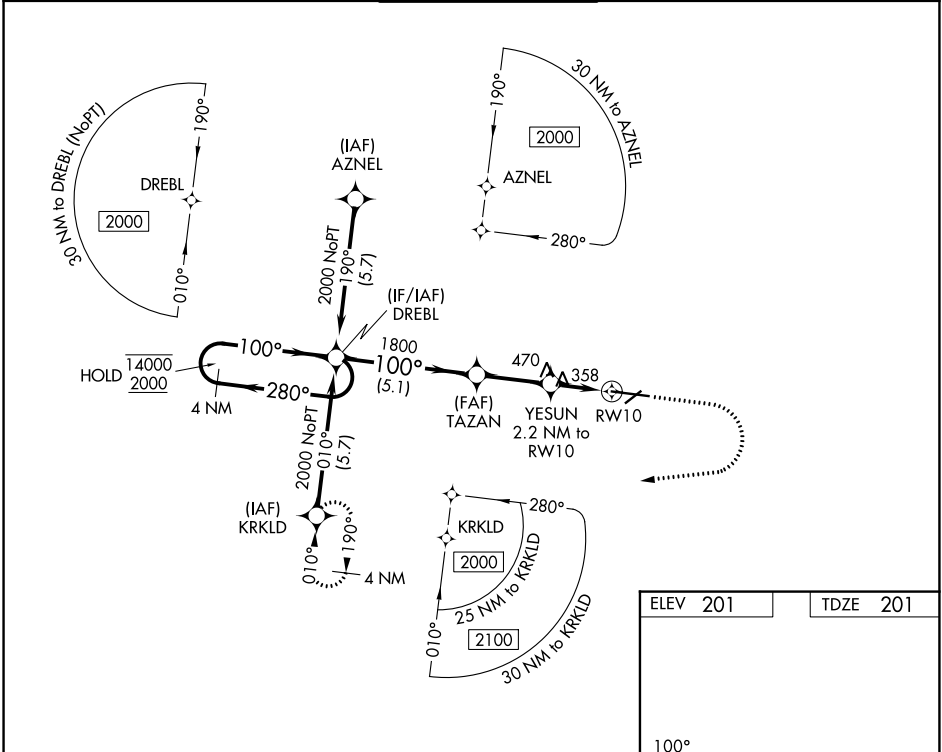

4 NM Holding Pattern

DREBL

TAZAN

YESUN

RW10

14000

2000

100°

280°

100°

1800

940

5.1 NM

2.7 NM

2.2 NM

700

2000

KRKLD

700-1

499 (500-1)

700-1 ¾

499 (500-1 ¾)

760-1

559 (600-1)

780-1 ½

579 (600-1 ½)

960-2 ½

759 (800-2 ½)

ELEV 201 TDZE 201

100°

TWR

8003 X 150

4000 X 75

REIL Rwys 10 and 28 0

MIRL Rwys 5-23 and 10-28 0