

WAAS CH 78230 W13A	APP CRS 133°	Rwy Ldg TDZE 35 Apt Elev 36
--	------------------------	---



RNAV (GPS) Y RWY 13
VALLEY INTL (HRL)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Port Isabel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. When local altimeter setting not received, use Port Isabel altimeter setting: increase LPV DA to 327 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 327 feet and all visibilities ¼ SM; increase all MDAs 60 feet and visibility Cats C and D ¼ SM.

MISSED APPROACH:
Climb to 2000 direct
AMAPE and hold.

ATIS 124.85	VALLEY APP CON 120.7 279.5	HARLINGEN TOWER ★ 119.3 (CTAF) 0 317.6	GND CON 121.7	UNICOM 122.95
-----------------------	--------------------------------------	--	-------------------------	-------------------------

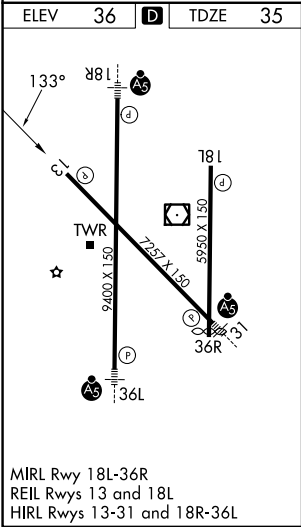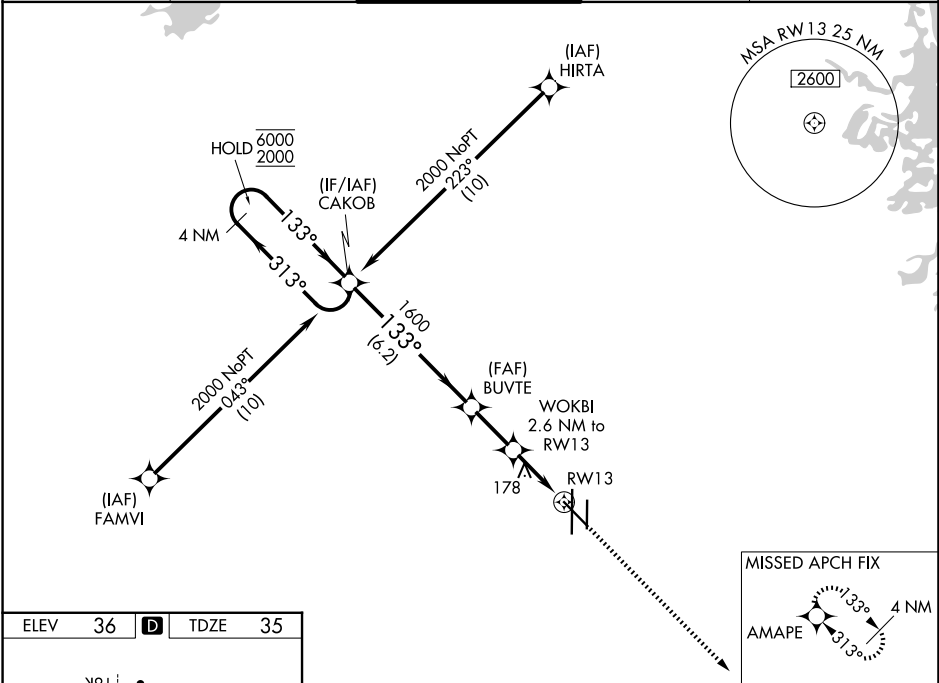

4 NM Holding Pattern		CAKOB		BUVTE		WOKBI		RW13	
6000		313°		133°		1600		920	
2000		133°		133°		2.6 NM to RW13		1.1 NM to RW13	
GP 3.00°		TCH 59		6.2 NM		2.1 NM		1.5 NM	
CATEGORY	A		B		C		D		
LPV DA	285-¾		250 (300-¾)						
LNAV/VNAV DA	285-¾		250 (300-¾)						
LNAV MDA	440-1		405 (500-1)		440-1½		405 (500-1½)		
CIRCLING	460-1		560-1		600-1½		680-2		
	424 (500-1)		524 (600-1)		564 (600-1½)		644 (700-2)		

SC-3, 06 AUG 2026 to 03 SEP 2026

SC-3, 06 AUG 2026 to 03 SEP 2026