

LOM TU	APP CRS	Rwy Ldg	7150
420	001°	TDZE	347
		Apt Elev	347



NDB RWY 36
TUPELO RGNL (TUP)

⚠ When local altimeter setting not received, use Columbus AFB altimeter setting and increase all MDA 120 feet, increase S-36 Cats C and D visibility ¾ SM and Circling Cats C and D ½ SM. For inop ALS, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 ¾ SM. For inop ALS when using Columbus AFB altimeter setting, increase S-36 Cat A and B visibility to 1 SM and Cat C and D to 1 ¾ SM.

MALSR
A5

MISSED APPROACH:
Climb to 1500 then climbing left turn to 3000 direct TU LOM and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 254.275	GND CON 121.825 254.275
-----------------	--------------------------------	--	----------------------------

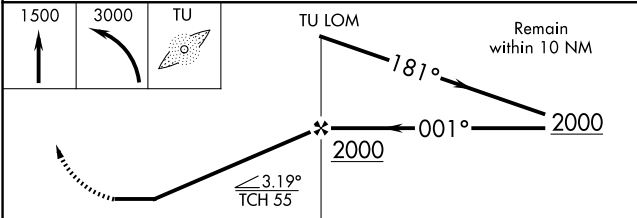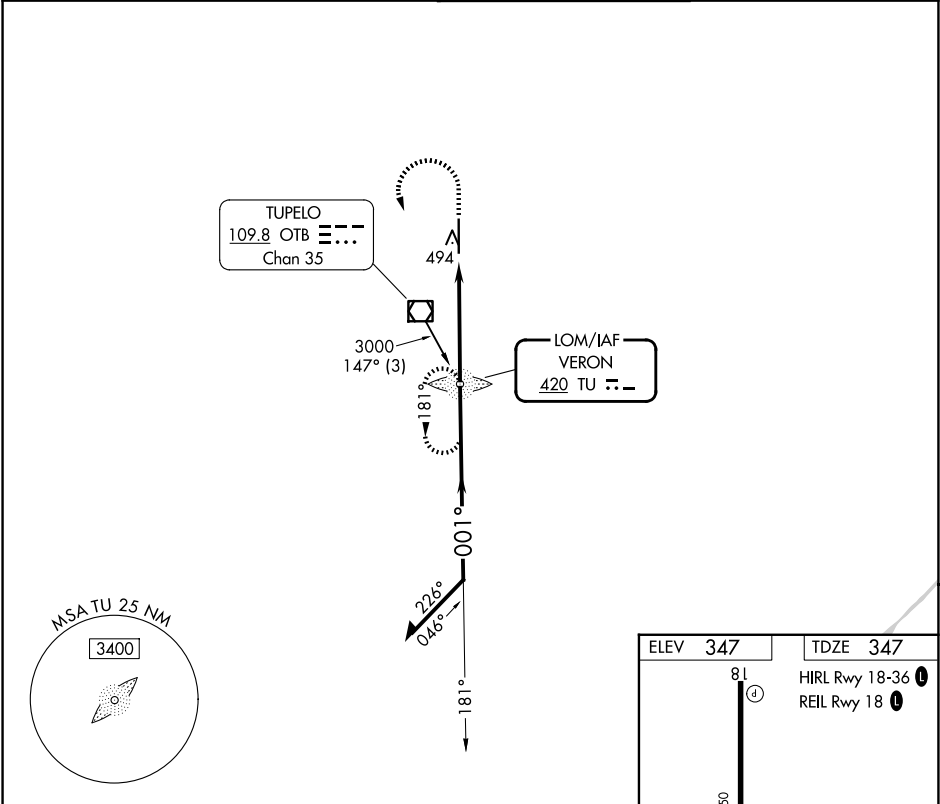

ELEV 347	TDZE 347
81	HIRL Rwy 18-36
	REIL Rwy 18
7150 X 150	TWR
36	A5
001°	
FAF to MAP 4.7 NM	
Knots	60 90 120 150 180
Min:Sec	4:42 3:08 2:21 1:53 1:34

CATEGORY	A	B	C	D
S- 36	840-¾ 493 (500-¾)	840-1 493 (500-1)		
CIRCLING	840-1 493 (500-1)	900-1½ 553 (600-1½)	1140-2½ 793 (800-2½)	