

LOC/DME I-AND 111.9 Chan 56	APP CRS 051°	Rwy Ldg TDZE 759 Apt Elev 782	ILS or LOC RWY 5 ANDERSON RGNL (AND)
---	------------------------	---	---

DME required.

T


A

When local altimeter setting not received, use Clemson altimeter setting and increase S-ILS 05 DA to 1006 feet; increase all MDAs 60 feet and Circling visibility Cat C/D ¼ SM. VDP NA when using Clemson altimeter setting. Circling Rwy 17, 35 NA at night. For inop ALS increase S-LOC 05 visibility Cat C/D to 1⅓ SM.

MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 2500 on heading 240° and on AHN VOR/DME R-042 to OYUNA/I-AND 12.5 DME and hold.

ASOS 120.675	GREER APP CON★ 118.8 270.275	CTAF 123.60
------------------------	--	-----------------------

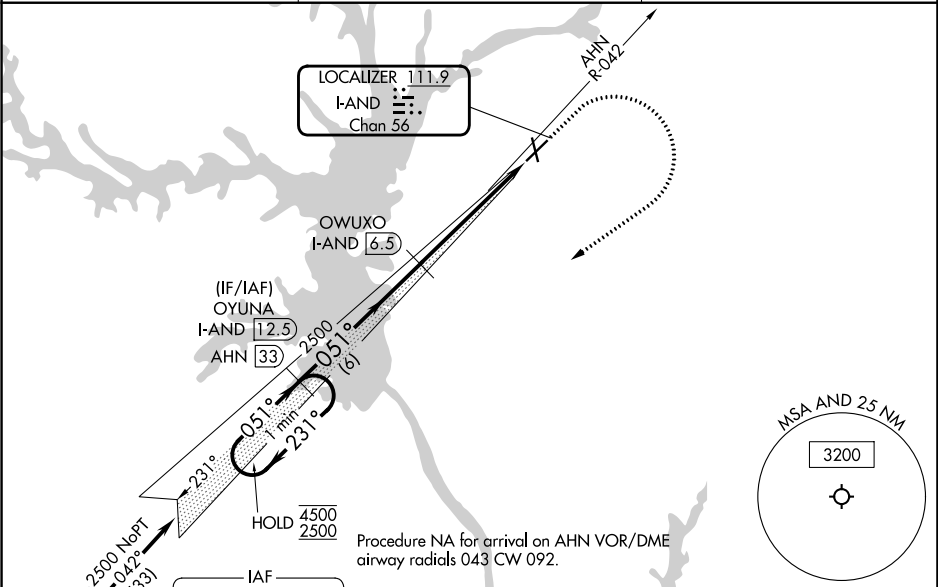

ELEV 782

TDZE 759

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 49).

One Minute Holding Pattern

OYUNA I-AND 12.5

OWUXO I-AND 6.5

4500

2500

231°

051°

051°

2500

2500

6 NM

4 NM

1.3 NM

GS 3.00°

TCH 54

1600

2500

↑

hdg 240°

AHN R-042

OYUNA I-AND 12.5

CATEGORY	A	B	C	D
S-ILS 5	959-½ 200 (200-½)			
S-LOC 5	1220-½	461 (500-½)	1220-1	461 (500-1)
CIRCLING	1260-1 478 (500-1)	1320-1 538 (600-1)	1440-1¾ 658 (700-1¾)	1500-2¼ 718 (800-2¼)

HIRL Rwy 5-23

ANDERSON, SOUTH CAROLINA

Andmt 2 29DEC22

34°30'N-82°43'W

ANDERSON RGNL (AND)

ILS or LOC RWY 5