

LOC/DME I-LFT	APP CRS	Rwy Ldg
109.5	216°	7659
Chan 32		TDZE 37
		Apt Elev 41




ILS or LOC RWY 22L
LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

⚠ Circling Rwy 11, 4R, 4L, and 22R NA at night. Rwy 22L helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to S-ILS 22L all Cats. When local altimeter setting not received, use ARA altimeter setting and increase S-ILS 22L DA to 316 feet, increase all MDAs 40 feet and S-LOC 22L visibility Cat C/D to RVR 5000 and Circling visibility Cat C/D ¼ SM. VDP NA when using ARA altimeter setting. For inop ALS, increase S-LOC 22L Cat A and B visibility to RVR 5500.



MISSED APPROACH:
Climb to 800 then climbing right turn to 2100 on LFT VORTAC R-264 to MICRO INT/ LFT 16 DME and hold.

ATIS 134.05	LAFAYETTE APP CON★ 121.1 363.0	LAFAYETTE TOWER★ 118.5 (CTAF) 0 257.8	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

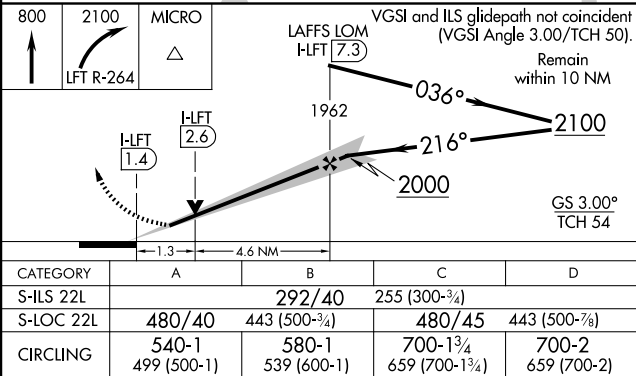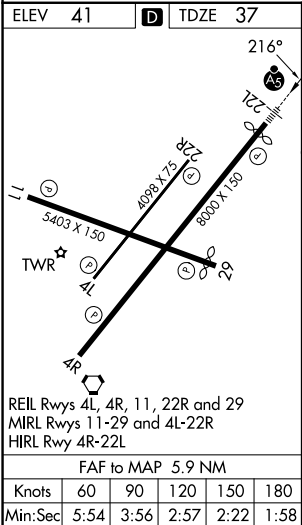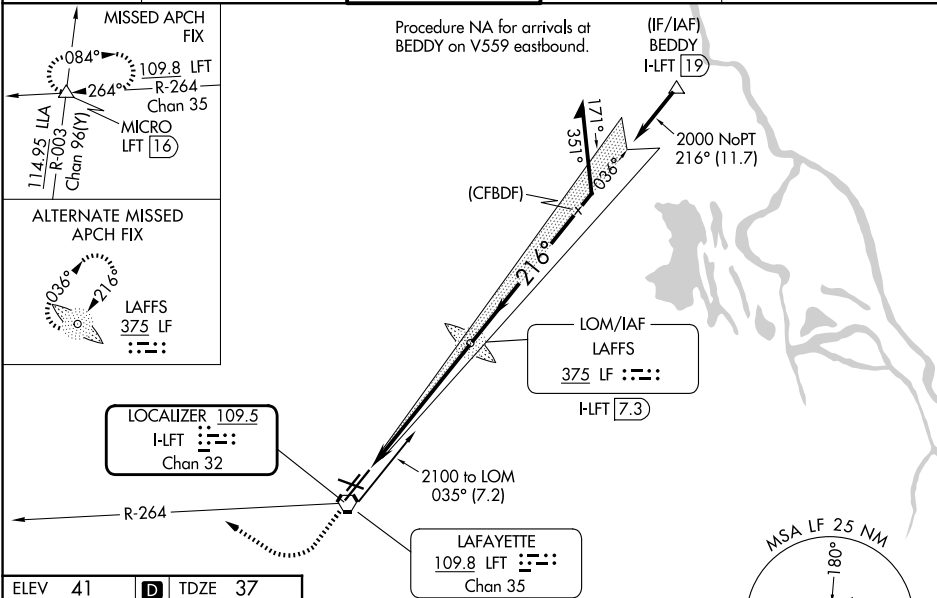

SC-4, 06 AUG 2026 to 03 SEP 2026

SC-4, 06 AUG 2026 to 03 SEP 2026