

LOC/DME I-LRU
109.3
Chan 30

APP CRS
307°

Rwy Ldg
TDZE
Apt Elev
7500
4444
4457

ILS or LOC RWY 30
LAS CRUCES INTL(LRU)

NA

DME required. When local altimeter setting not received, use Deming altimeter setting: increase DA to 4758 feet and all visibilities ½ mile; increase all MDA 120 feet and visibility Cat C and D ½ mile. VDP NA when using Deming altimeter setting.


MALSR

MISSED APPROACH: Climb to 5100 then climbing left turn to 9000 on heading 139° and on DMN VORTAC R-094 to MOLLY INT/DMN 46.7 DME and hold, continue climb-in-hold to 9000.

AWOS-3PT
119.025

ALBUQUERQUE CENTER
128.2 285.5

UNICOM
122.7 (CTAF)

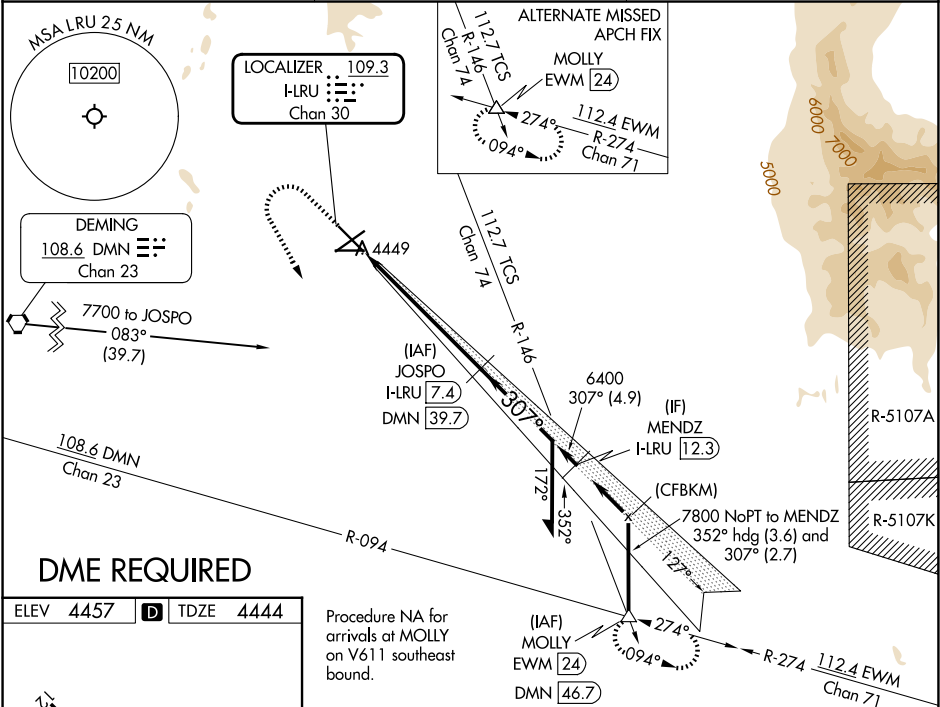

ELEV 4457 D TDZE 4444

12

7508 X 100

7501 X 105

6069 X 100

0.3% UP

307°

REIL Rwy 12
HIRL Rwy 12-30
MIRL Rws 4-22 and 8-26

5100 9000
hdg 139°

DMN R-094

MOLLY

JOSPO I-LRU 7.4

Remain within 10 NM

*LOC only.

*I-LRU 2.2

I-LRU 1.4

6400

307°

6400

GS 3.00° TCH 47

CATEGORY	A	B	C	D
S-ILS 30	4644-½ 200 (200-½)			
S-LOC 30	4720-½ 276 (300-½)			
CIRCLING	4900-1 443 (500-1)	5040-1 583 (600-1)	5320-2½ 863 (900-2½)	5320-2¾ 863 (900-2¾)