

WAAS CH 93836 W12A	APP CRS 127°	Rwy Ldg TDZE Apt Elev 7506 4457 4457
--	------------------------	--

RNAV (GPS) RWY 12


LAS CRUCES INTL (LRU)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12 °C (11°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Deming altimeter setting. When local altimeter setting not received, use Deming altimeter setting: increase LPV DA to 4821 feet and LNAV/VNAV DA to 4824 feet and all visibilities ½ mile; increase all MDA 120 feet and visibility Cat C and D ½ mile.

MISSED APPROACH: Climb to 5800 then climbing right turn to 8100 direct IPATE and hold.

AWOS-3PT 119,025	ALBUQUERQUE CENTER 128.2 285.5	UNICOM 122.7 (CTAF) 0
----------------------------	--	---------------------------------

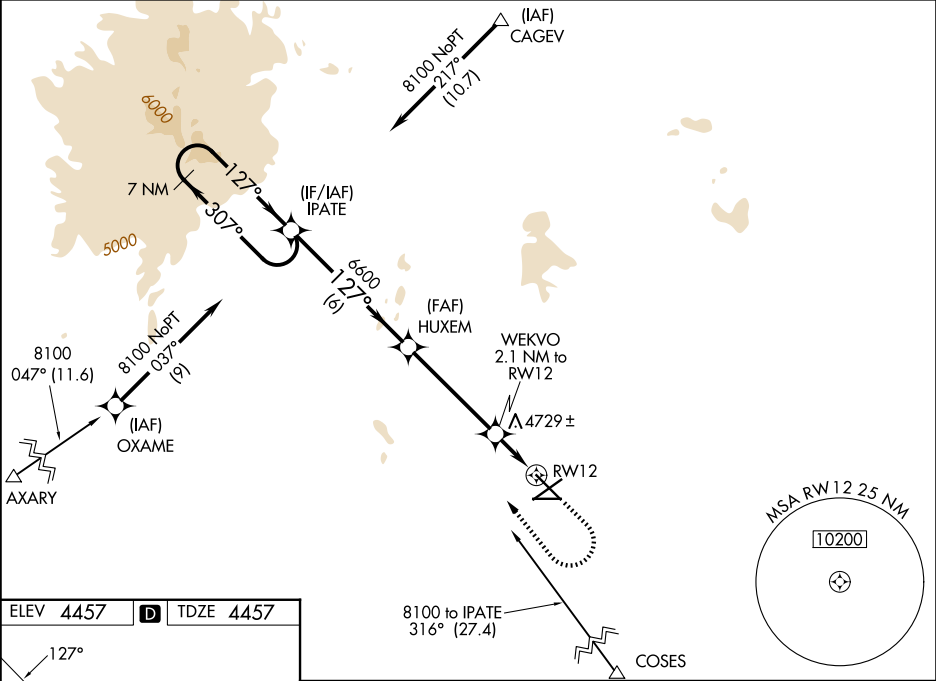

ELEV 4457	D	TDZE 4457
-----------	---	-----------

127°

7506 X 100

7501 X 105

6069 X 100

0.3° UP

30°

REIL Rwy 12

HIRL Rwy 12-30

MIRL Rwy 4-22 and 8-26

7 NM Holding Pattern 8100 ← 307° 127° → GP 3.00° TCH 55				IPATE 6600 6 NM	HUXEM 6600 4.5 NM	WEKVO 2.1 NM to RW12 *1.2 NM to RW12 RW12 *5180 0.9 1.2 NM	5800 8100 IPATE *LNAV only.
CATEGORY	A	B	C	D			
LPV DA	4707-¾		250 (300-¾)				
LNAV/VNAV DA	4710-¾		253 (300-¾)				
LNAV MDA	4900-1	443 (500-1)	4900-1⅓	443 (500-1⅓)			
CIRCLING	4900-1 443 (500-1)	5040-1 583 (600-1)	5320-2½ 863 (900-2½)	5320-2¾ 863 (900-2¾)			