

RNP APCH.

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cats C/D visibility to RVR 5500.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALS R


MISSED APPROACH:

Climb to 2500 direct ANEPE and hold.

ATIS 124.1	GREEN BAY APP CON★ 119.4 338.2	GREEN BAY TOWER★ 118.7(CTAF) 257.8	GND CON 121.9
---------------	-----------------------------------	---------------------------------------	------------------

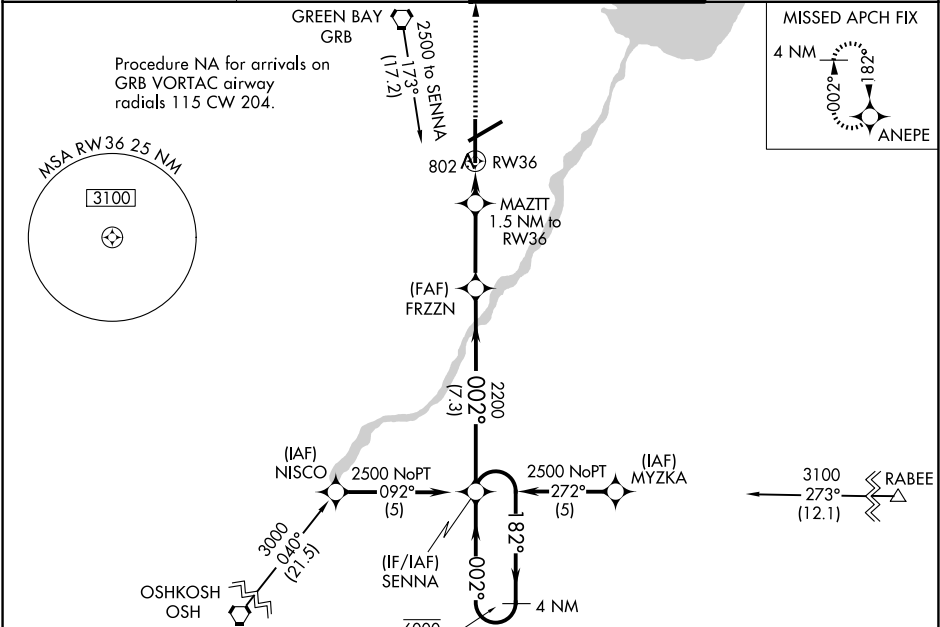

ELEV 695	D	TDZE 684
HIRL Rwy 6-24 and 18-36 REIL Rwy 18		

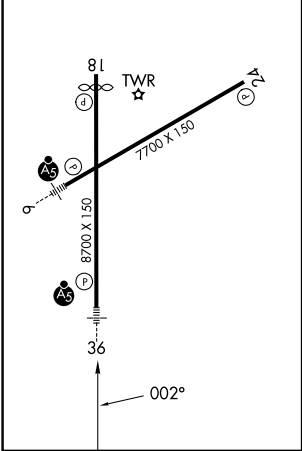

2500 ANEPE	4 NM Holding Pattern		
* LNAV only.	MAZTT 1.5 NM to RW36	FRZZN	SENN A
RW36	1200*	2200	182° 002° 6000 2500
GP 3.00° TCH 50			
1.5 NM 3.1 NM 7.3 NM			
CATEGORY	A	B	C D
LPV DA	884/24 200 (200-½)		
LNAV/VNAV DA	1097/40 413 (500-¾)		
LNAV MDA	1060/24 376 (400-½)	1060/35 376 (400-¾)	
CIRCLING	1200-1 505 (600-1)	1300-1¾ 605 (700-1¾)	1300-2 605 (700-2)