

WAAS CH 56311 W26A	APP CRS 258°	Rwy Ldg 8704 TDZE 4154 Apt Elev 4154
--	------------------------	---

RNAV (GPS) RWY 26

JOSLIN FLD/MAGIC VALLEY RGNL (TWF)

T A	Circling to Rwy 30 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 49°C (121°F). DME/DME RNP-0.3 NA.	MALSR 	MISSED APPROACH: Climb to 4700 then climbing right turn to 6000 direct UYEME and hold.
---------------------------------	---	--	---

ASOS 135.025	TWIN FALLS APP CON* 126.7 353.75	TWIN FALLS TOWER* 118.2 (CTAF) 0 317.5	GND CON 121.7	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

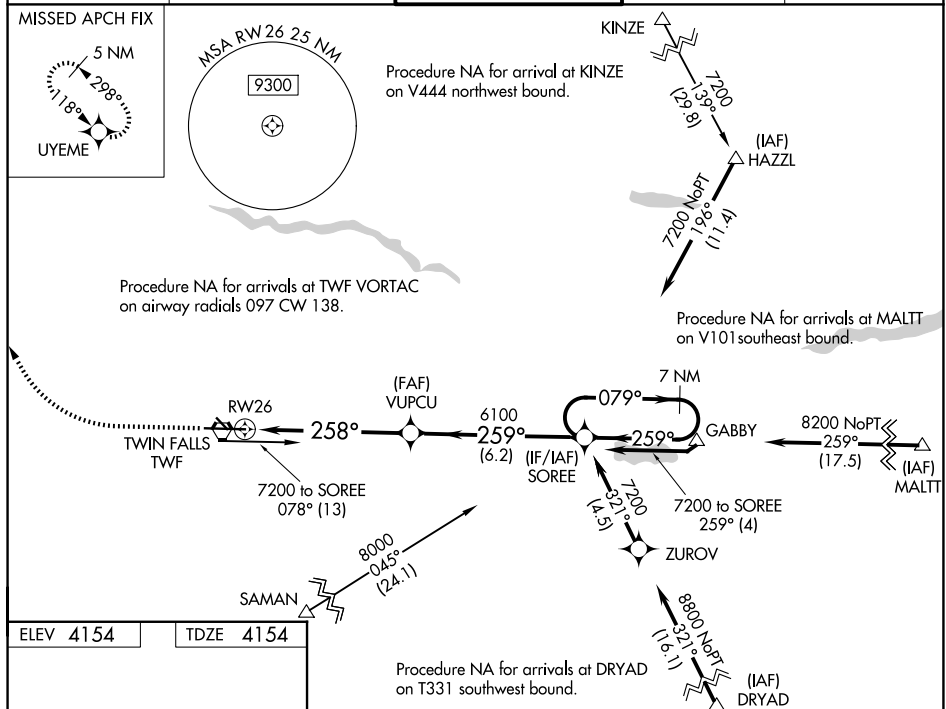


Diagram illustrating the RWY 26 approach and holding pattern. The diagram shows the runway layout, including the 258° heading, the 1.5 NM distance to RW26, and the 7 NM Holding Pattern. The diagram also includes a table with categories (LPV, LNAV/VNAV, LNAV MDA, CIRCLING) and distances (A, B, C, D).

CATEGORY	A	B	C	D
LPV DA	4354-1/2	200 (200-1/2)		
LNAV/VNAV DA	4533-3/4	379 (400-3/4)		
LNAV MDA	4680-1/2	526 (600-1/2)	4680-1	526 (600-1)
CIRCLING	4700-1 546 (600-1)	4780-1 626 (700-1)	5160-3	1006 (1100-3)