



WAAS CH 78572 W32A	APP CRS 324°	Rwy Idg TDZE Apt Elev	7345 153 153
--	------------------------	-----------------------------	---

RNAV (GPS) Z RWY 32

MONMOUTH EXEC (BLM)

RNP APCH - GPS.	▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Lakehurst altimeter setting and increase LPV DA to 442 feet, increase LNAV/VNAV DA to 442 feet. Baro-VNAV NA when using Lakehurst altimeter setting.	MISSED APPROACH: Climb to 2000 direct HAVOT, track 278° to RBV VORTAC and hold.
-----------------	--	--

AWOS-3PT 121.625	MC GUIRE APP CON 126.475 363.8	CLNC DEL 126.15	UNICOM 123.0 (CTAF)
----------------------------	--	---------------------------	-------------------------------

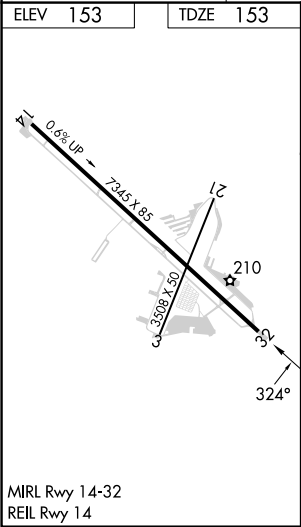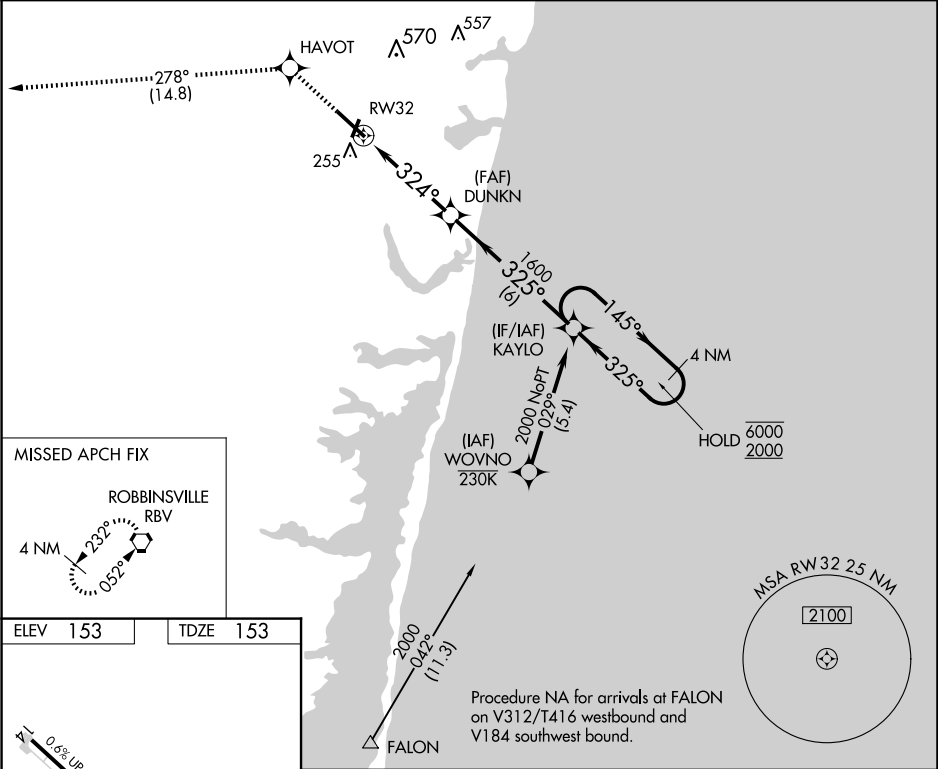

2000	HAVOT	tr 278°	RBV	KAYLO	4 NM Holding Pattern
				DUNKN 1600	145° → 6000 ← 325° 2000
				RW32	GP 3.10° TCH 51
				4.2 NM	6 NM
CATEGORY	A	B	C	D	
LPV DA		403-1	250 (300-1)		
LNAV/VNAV DA		403-1	250 (300-1)		