


RNAV (GPS) RWY 9L
ORLANDO SANFORD INTL (SFB)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Baro-VNAV and VDP NA when using Orlando Exec altimeter setting. When local altimeter setting not received, use Orlando Exec altimeter setting and increase LPV DA to 282, LNAV/VNAV DA to 501 and all MDA 60 feet; increase LNAV/VNAV all Cats visibilities ½ SM and LNAV Cat C/D visibility ¼ SM. Night landing: Rwy 27C NA.



MISSED APPROACH: Climb to 1600 direct UXFIM and hold.

GND CON
121.35 254.35

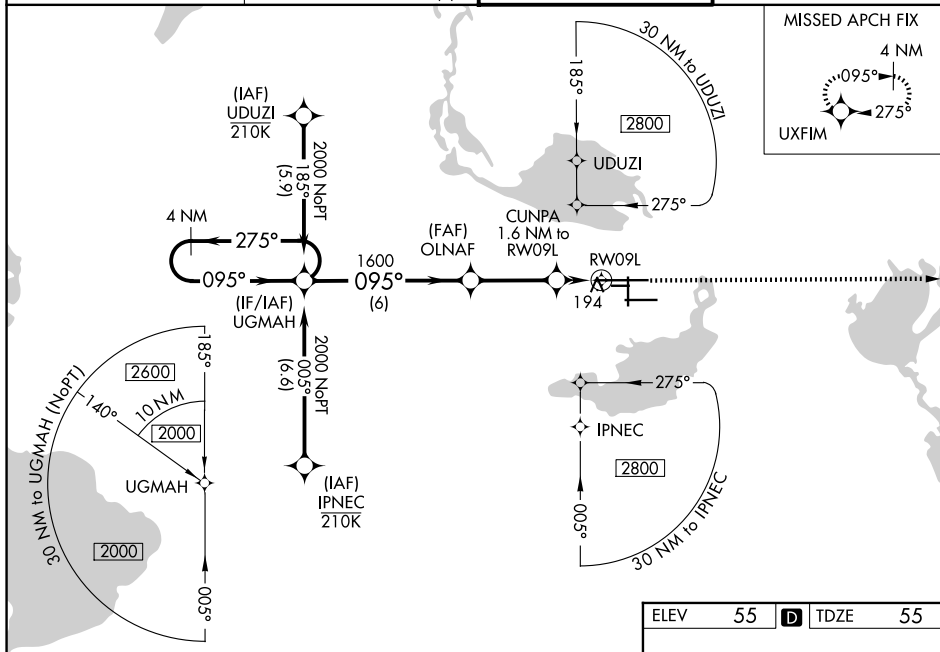

SE-3, 06 AUG 2026 to 03 SEP 2026

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 71).

4 NM Holding Pattern

UGMAH

OLNAF

CUNPA
1.6 NM to RW09L

RW09L

*1.1 NM to RW09L

*600

GP 3.00°
TCH 55

2000

275°

095°

1600

1600

UXFM

*RNAV only.

CATEGORY	A	B	C	D
LPV DA		255-½	200 (200-½)	
RNAV/ VNAV DA		355-½	300 (300-½)	
RNAV MDA	460-½	405 (500-½)	460-¾	405 (500-¾)
CIRCLING	580-1	525 (600-1)	600-1½ 545 (600-1½)	640-2 585 (600-2)

