


APP CRS	Rwy Ldg	10200
258°	TDZE	926
	Apt Elev	944

RNAV (RNP) Z RWY 26L

ONTARIO INTL (ONT)

RNP AR APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 3400 on track 258° to AXOYO and track 174° to LAKVE and track 122° to MRIAM and track 079° to ADRYN and hold.
For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. For inop ALS, increase RNP 0.10 visibility all Cats to RVR 4500, RNP 0.17 visibility all Cats to RVR 5000, RNP 0.30 visibility all Cats to RVR 6000.		

D-ATIS 124.25	SOCAL APP CON 127.0 318.2	ONTARIO TOWER 120.6 360.775	GND CON 121.9 257.8
------------------	------------------------------	--------------------------------	------------------------

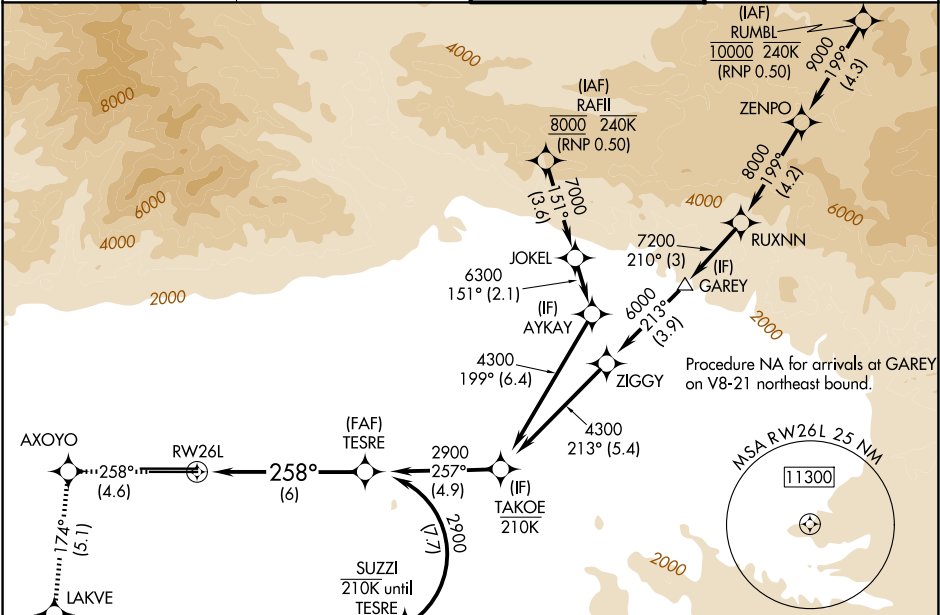

ELEV 944

TDZE 926

3400

AXOYO

tr 258°

174°

LAKVE

tr 174°

122°

MRIAM

tr 122°

079°

ADRYN

tr 079°

2900

TESRE

tr 258°

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).

See planview for multiple IF locations.

6 NM

GP 3.00°

TCH 58

CATEGORY	A	B	C	D
RNP 0.10 DA		1203/24	277 (300-½)	
RNP 0.17 DA		1245/24	319 (400-½)	
RNP 0.30 DA		1322/35	396 (400-¾)	

AUTHORIZATION REQUIRED

TDZL/RCLS Rwy 8L, 26L and 26R

HIRL Rwy 8L-26R and 8R-26L