


LOC I-GNV 111.3	APP CRS 286°	Rwy Ldg TDZE 122 Apt Elev 151
---------------------------	------------------------	---


ILS or LOC RWY 29
GAINESVILLE RGNL (GNV)

DME required. RADAR required for procedure entry at DANTE.		MALSR 	MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 on heading 140° and OCF VORTAC R-355 to JODON/OCF 16 DME and hold.
▼ ▲	When local altimeter setting not received, use OCF altimeter setting and increase S-ILS 29 DA to 403 feet; increase all MDAs 100 feet and S-LOC 29 visibility Cat C/D to RVR 6000, and Circling visibility Cat C/D ½ SM. For inop ALS when using OCF altimeter setting, increase S-ILS 29 all Cats visibility to RVR 4500. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using OCF altimeter setting.)		

ATIS 127.15	JACKSONVILLE APP CON 118.175 338.25	GAINESVILLE TOWER★ 119.55 (CTAF) 0 353.7	GND CON 121.7	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

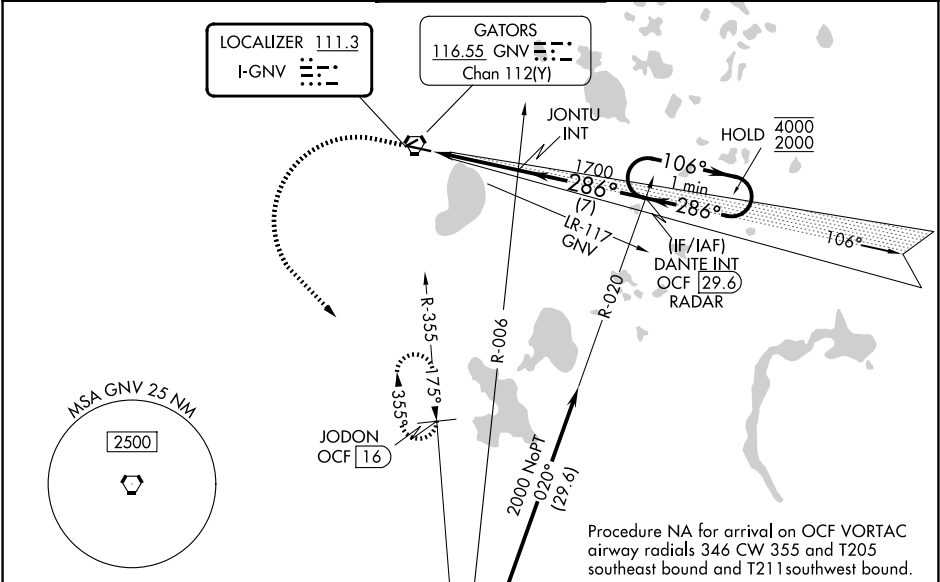

ELEV 151	TDZE 122
----------	----------

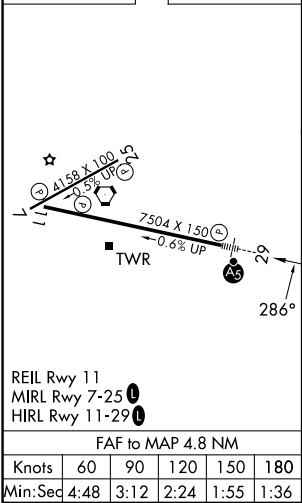

1100 2000 ↑ hdg 140°	OCF R-355	JODON OCF 16	DANTE INT OCF 29.6 RADAR				One Minute Holding Pattern	
			JONTU INT 1700 286° 1700		106° → 4000 ← 286° 2000			
			4.8 NM		7 NM		GP 3.00° TCH 54	
CATEGORY	A		B		C		D	
S-ILS 29 *			322/24		200 (200-½)			
S-LOC 29	580/24		458 (500-½)		580/45		458 (500-¾)	
CIRCLING	620-1 469 (500-1)		700-1 549 (600-1)		760-1¾ 609 (700-1¼)		820-2 669 (700-2)	