

WAAS CH 99330 W16A	APP CRS 158°	Rwy Ldg TDZE 213 Apt Elev 213
--	------------------------	---

RNAV (GPS) RWY 16


TRENTON MERCER (TTN)

▼ Night Landing: Rwy 34 operational VGSI required, remain on or above VGSI glidepath until threshold.
Baro-VNAV NA when using Northeast Philadelphia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

▲ Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received use Northeast Philadelphia altimeter setting; increase LPV DA to 510 feet and all Cats visibility ¾ SM, LNAV/VNAV DA to 576 feet; increase all MDA 60 feet and LNAV Cat C/D visibility ¾ SM and Circling Cat C visibility ½ SM.

MISSED APPROACH:
Climb to 1500 then
climbing right turn to
2700 direct ZUBAX
and hold.

ATIS 126.775	PHILADELPHIA APP CON 123.8 291.7	TRENTON TOWER ★ 120.7 (CTAF) 0 257.8	GND CON 121.9 257.8	UNICOM 122.95
------------------------	--	--	-------------------------------	-------------------------

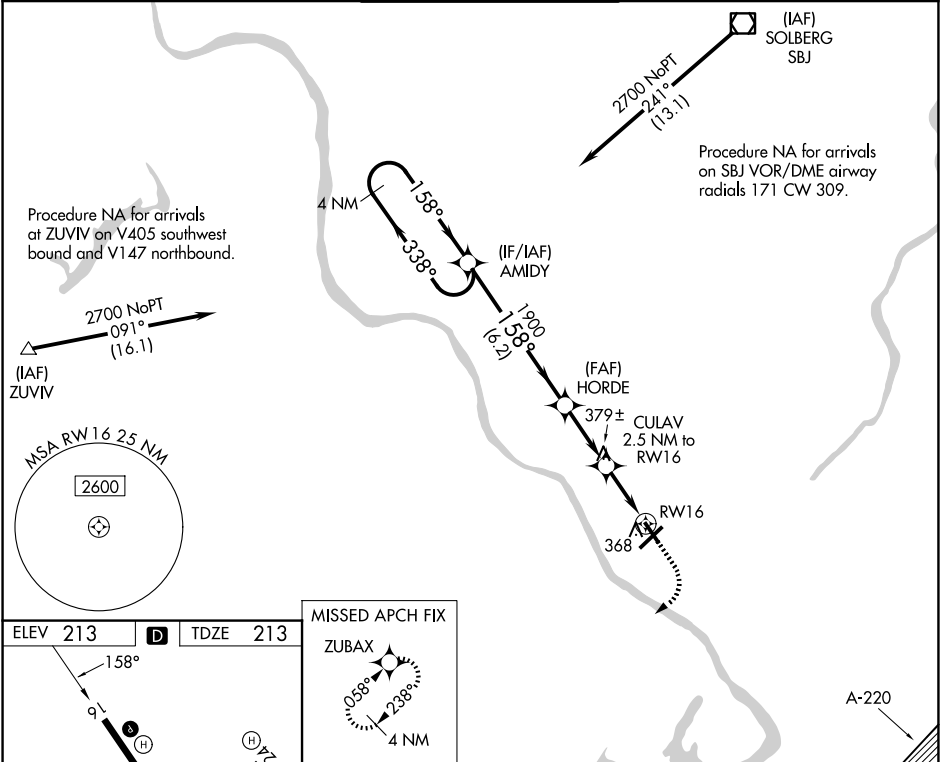

ELEV 213 D TDZE 213	MISSED APCH FIX ZUBAX 058° 238° 4 NM	1500 2700 ZUBAX VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).	4 NM Holding Pattern
158° 4800' x 30' TWR 0.5% UP 6000' x 150' 0.8% UP 54'	* LNAV only. 1.2 NM to RW16 1.3 2.6 NM 6.2 NM	CULAV 2.5 NM to RW16 1060 1900 158° 338° 2700 158°	GP 3.00° TCH 55
CATEGORY	A	B	C D
LPV DA	463-¾	250 (300-¾)	
LNAV/VNAV DA	529-1	316 (400-1)	
LNAV MDA	640-1 427 (500-1)	640-1¼ 427 (500-1¼)	
CIRCLING	680-1 467 (500-1)	760-1½ 547 (600-1½)	960-2½ 747 (800-2½)

HIRL Rwy 6-24 and 16-34
REIL Rwy 16, 24 and 34

NE-2, 06 AUG 2026 to 03 SEP 2026

NE-2, 06 AUG 2026 to 03 SEP 2026