

WAAS CH 69503 W27A	APP CRS 274°	Rwy Ldg 6122 TDZE 812 Apt Elev 812
--	------------------------	---

RNAV (GPS) RWY 27
ATHENS/BEN EPPS (AHN)


RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C.
⚠ When local altimeter setting not received, use Winder altimeter setting: increase LPV DA to 1071 feet; increase LNAV/VNAV DA to 1121 feet; increase all MDA 60 feet and increase LNAV Cat C/D visibility to 1 mile and Circling Cat D visibility to 2¼ mile. For inop MALSF, increase LNAV/VNAV all Cats visibility to ¾ mile, increase LNAV Cat C/D visibility to 1 mile. For inop MALSF when using Winder altimeter setting increase LPV all Cats visibility to ¾ mile, increase LNAV/VNAV all Cats visibility to 1 mile, increase LNAV Cat C, D visibility to 1½ mile. Baro-VNAV and VDP NA when using Winder altimeter setting. Inop table does not apply to LPV. Circling Rwy 2, 20 NA at night.

MALSF

MISSED APPROACH:
Climb to 2500 direct
SALIN and hold.

ASOS 132.875	ATLANTA APP CON ★ 132.475 291.1	ATHENS TOWER ★ 126.3 (CTAF) 0 338.275	GND CON 121.8	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

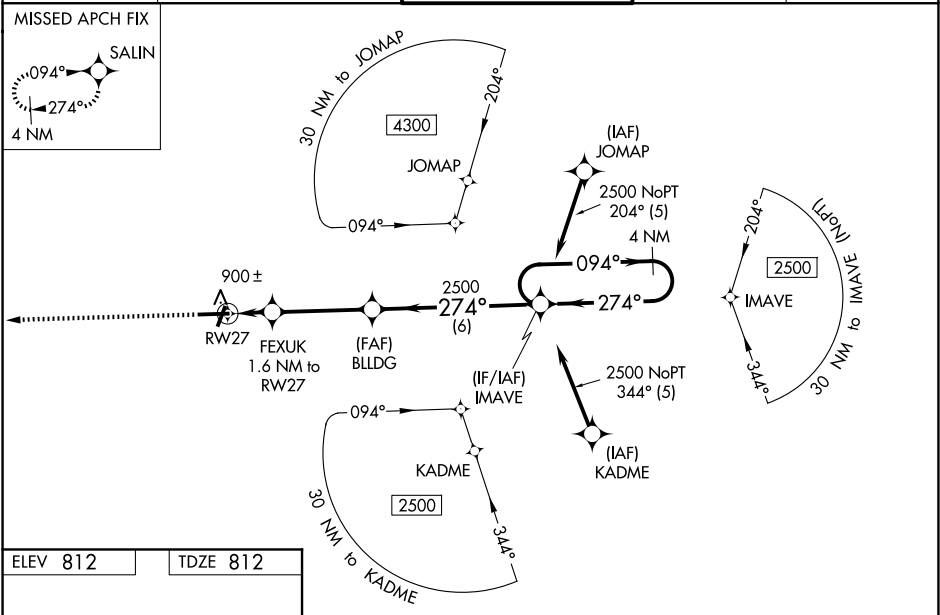

ELEV **812** TDZE **812**

MIRL Rwy 2-20
HIRL Rwy 9-27

2500 SALIN

*LNAV only

FEXUK 1.6 NM to RW27

BLDG 2500

IMAVE 4 NM Holding Pattern

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA		1012-¾	200 (200-¾)	
LNAV/VNAV DA		1064-¾	252 (300-¾)	
LNAV MDA		1160-¾	348 (400-¾)	
CIRCLING	1260-1 448 (500-1)	1280-1 468 (500-1)	1320-1½ 508 (600-1½)	1460-2 648 (700-2)

SE-4, 06 AUG 2026 to 03 SEP 2026

SE-4, 06 AUG 2026 to 03 SEP 2026