

LOC/DME I-MFE 111.7 Chan 54	APP CRS 137°	Rwy Ldg 6983 TDZE 107 Apt Elev 107
---	------------------------	---

ILS or LOC RWY 14
MC ALLEN INTL (MF'E)


ADF required.

⚠ Circling NA northeast of Rwy 14-32. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet; increase all MDA 40 feet and S-LOC 14 Cat C/D and Circling Cat C visibility 1/8 mile, increase LOBIC Fix Minimums S-LOC 14 Cat C/D visibility 1/4 mile. For inop ALS, increase S-LOC 14 Cat C/D visibility to 1 3/8 SM. For inop ALS when using Weslaco altimeter setting, increase LOBIC Fix Minimums S-LOC 14 Cat C/D visibility to 1 3/8 SM.


MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2000 direct to MISSI LOM and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER ★ 118.5 (CTAF) 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	---	-------------------------	-------------------------

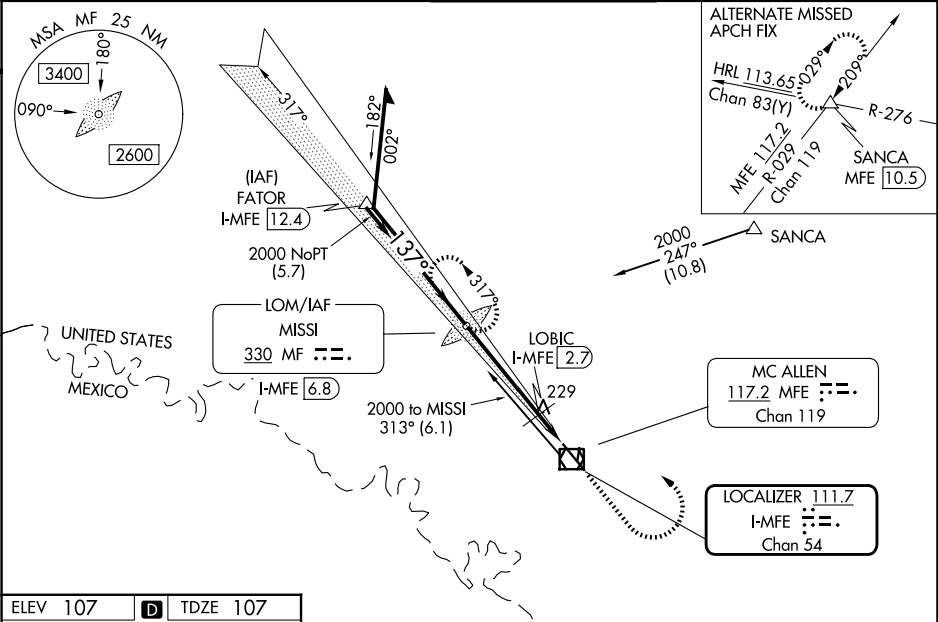

ELEV 107	D	TDZE 107
----------	---	----------

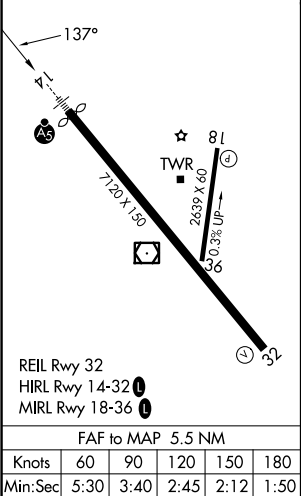

REIL Rwy 32 HIRL Rwy 14-32 MIRL Rwy 18-36			
FAF to MAP 5.5 NM			
Knots	60	90	120 150 180
Min:Sec	5:30	3:40	2:45 2:12 1:50
CATEGORY			
A			
B			
C			
D			
S-ILS 14			
S-LOC 14			
CIRCLING			
LOBIC FIX MINIMUMS			
S-LOC 14			
CIRCLING			