
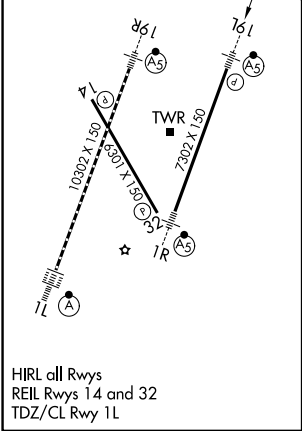


APP CRS	Rwy Ldg	7302
196°	TDZE	1320
	Apt Elev	1333

RNAV (RNP) Z RWY 19L
WICHITA DWIGHT D EISENHOWER NTL (ICT)

RNP AR APCH. For uncompensated Baro-VNAV systems, procedure NA below -15°C (5°F) or above 54°C (130°F). For inoperative MALS, increase RNP 0.11 all Cats visibility to ¾ mile and RNP 0.30 all Cats visibility to 1½ mile. GPS required. Simultaneous approach authorized with ILS or LOC RWY 19R. Use of FD or AP providing RNAV track guidance required during simultaneous operations.	MALS 	MISSED APPROACH: Climb to 3600 on track 196° to YELOO and hold.
--	----------	---

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
----------------	--------------------------------	------------------------------	------------------------

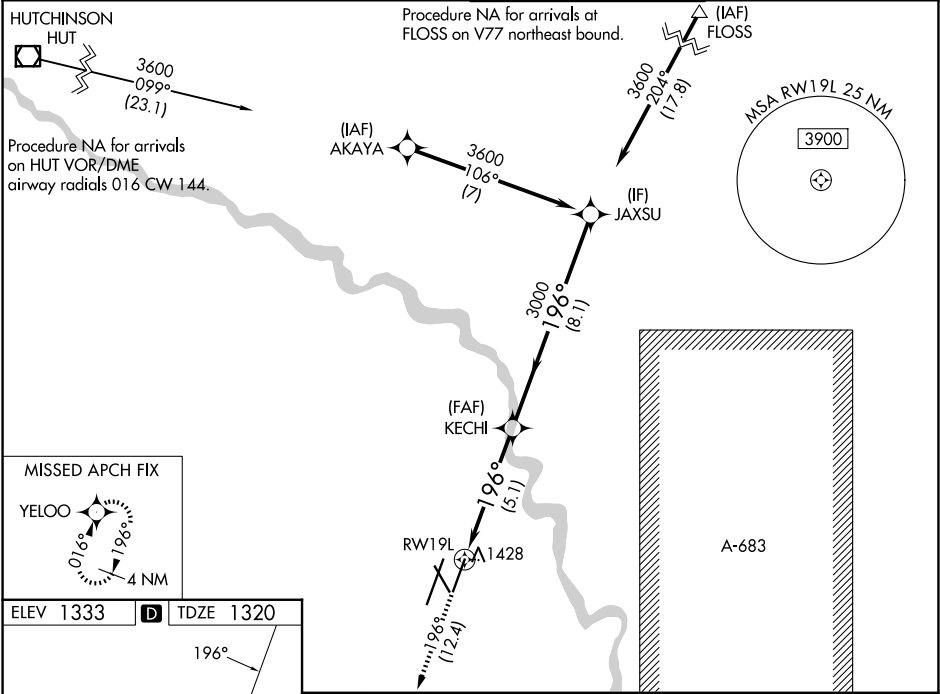

3600

YELOO

↑

tr 196°

KECHI

3000

JAXSU

3600

196°

3000

5.1 NM

8.1 NM

GP 3.00°

TCH 54

RW19L

3600

YELOO

↑

tr 196°

KECHI

3000

JAXSU

3600

196°

3000

5.1 NM

8.1 NM

GP 3.00°

TCH 54

CATEGORY	A	B	C	D
RNP 0.11 DA		1570-½	250 (300-½)	
RNP 0.30 DA		1800-1⅛	480 (500-1⅛)	

AUTHORIZATION REQUIRED