

APP CRS	Rwy Ldg	10302
196°	TDZE	1330
	Apt Elev	1333

RNAV (RNP) Z RWY 19R


WICHITA DWIGHT D EISENHOWER NTL (ICT)

For uncompensated Baro-VNAV systems, procedure NA below -1.5°C (5°F) or above 54°C (130°F). For inoperative MALS, increase all Cnts visibility to 1 ¼ mile. GPS required.

MALS

MISSED APPROACH: Climb to 4200 on track 196° to CUTIK and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
----------------	--------------------------------	------------------------------	------------------------

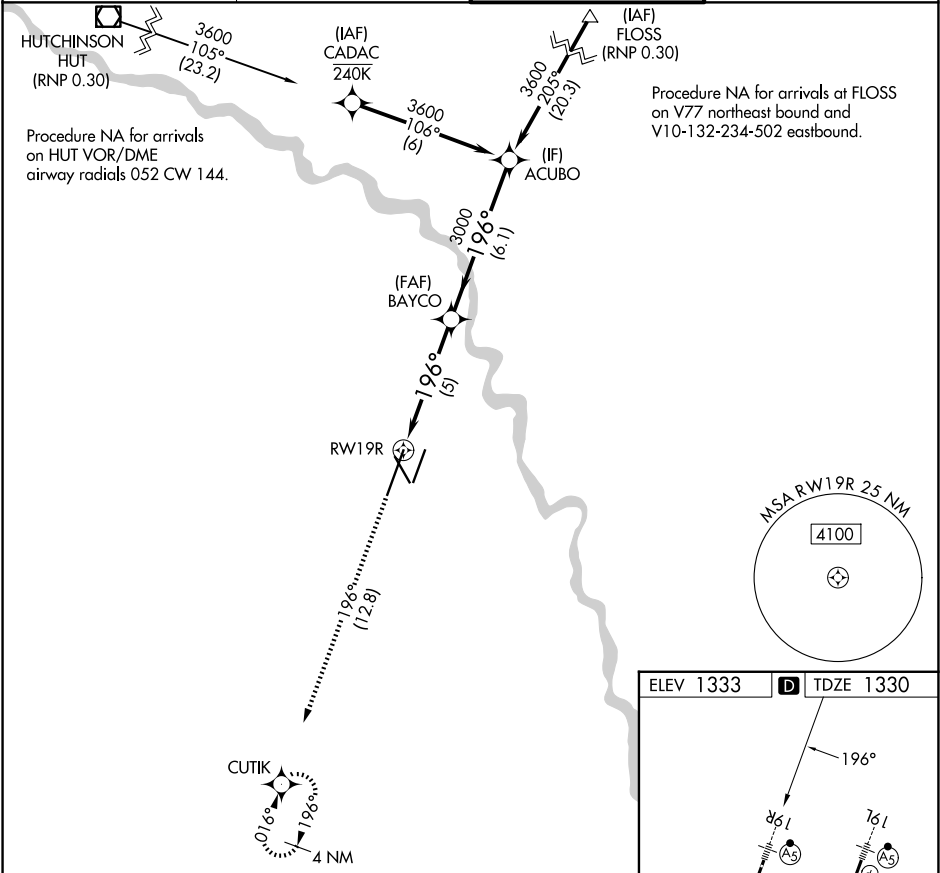

4200	CUTIK	BAYCO		ACUBO
↑ tr 196°		3000	196°	3600
RWY19R		3000	GP 3.00° TCH 52	
5 NM		6.1 NM		
CATEGORY	A	B	C	D
RNP 0.30 DA	1727/50 397 (400-1)			
AUTHORIZATION REQUIRED				

