


APP CRS	Rwy Ldg	10302
016°	TDZE	1314
	Apt Elev	1333

RNAV (RNP) Z RWY 1L


WICHITA DWIGHT D EISENHOWER NTL (ICT)

RNP AR APCH	ALSF-2	MISSED APPROACH:
Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 5500.		Climb to 4200 on track 016° to ACUBO and hold.

ATIS	WICHITA APP CON	WICHITA TOWER	GND CON
125.15	126.7 353.5	118.2 257.8	121.9 348.6

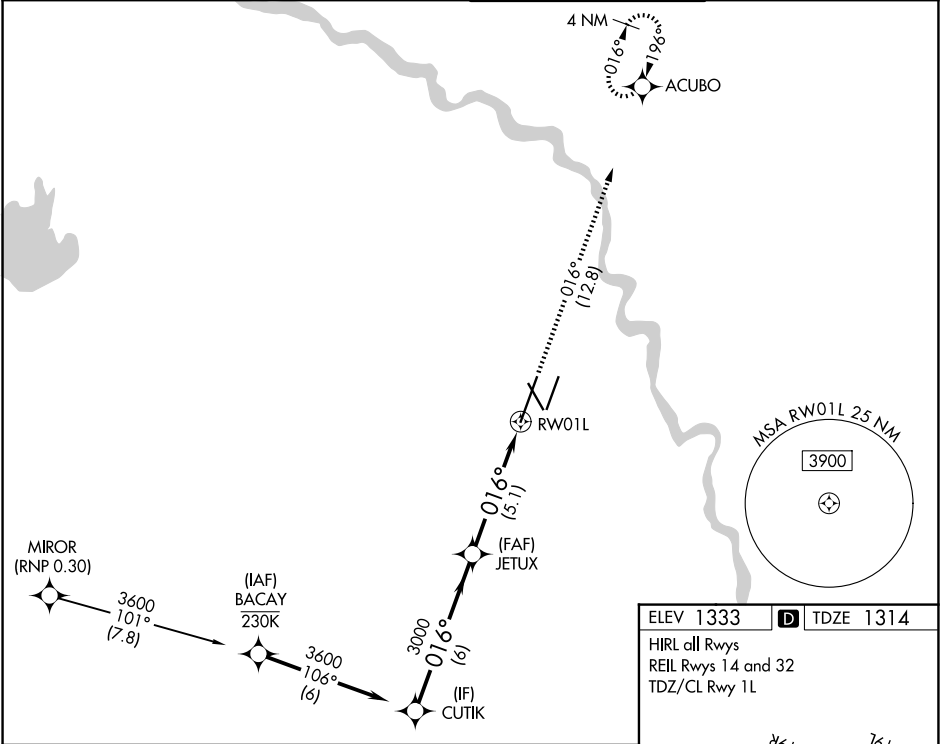

CUTIK		JETUX		4200	ACUBO
3600		3000		↑ fr 016°	
GP 3.00° TCH 52		3000		RW01L	
6 NM		5.1 NM			
CATEGORY	A	B	C	D	
RNP 0.15 DA	1626/28		312 (300-5%)		
RNP 0.30 DA	1676/35		362 (400-5%)		
AUTHORIZATION REQUIRED					

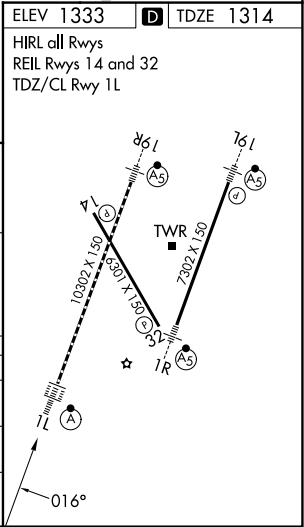

NC-2, 06 AUG 2026 to 03 SEP 2026

NC-2, 06 AUG 2026 to 03 SEP 2026