

WAAS CH 50517 W18A	APP CRS 184°	Rwy Idg TDZE Apt Elev	4498 22 24
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 18

ARANSAS COUNTY (RKP)


V Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet; increase LNAV/VNAV visibility all Cats ¼ mile. VDP NA with Ingleside altimeter setting.

MISSED APPROACH: Climb to 2000 direct YAYUR and on track 108° to PITYI and hold, continue climb-in-hold to 2000.

ASOS 119.275	CORPUS APP CON 120.9 348.725	CLINC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	--	---------------------------	---

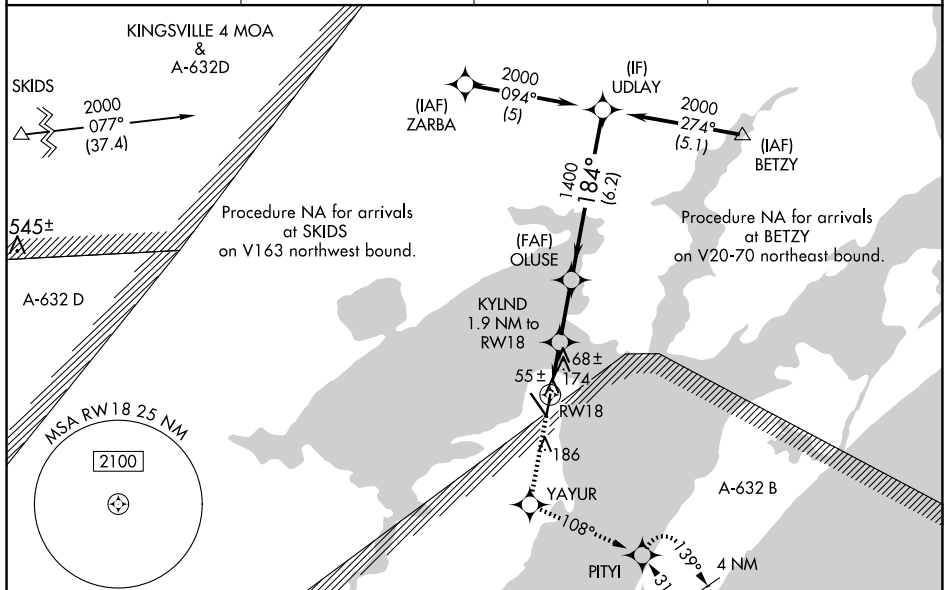

ELEV 24	TDZE 22
---------	---------

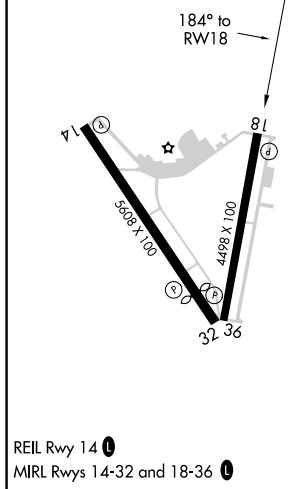

  		Procedure Turn NA	
*LNAV only		KYLND 1.9 NM to RW18	
*1.2 NM to RW18		OLUSE 1400	
RW18		184°	
*660		1400	
1.2 0.7 2.3 NM 6.2 NM		UDLAY 2000	
GP 3.00° TCH 39			
CATEGORY	A	B	C
LPV DA	272-1	250 (300-1)	NA
LNAV/VNAV	459-1½	437 (500-1½)	NA
LNAV MDA	440-1	418 (500-1)	440-1¼ 418 (500-1¼)
CIRCLING	500-1	476 (500-1)	500-1½ 476 (500-1½)