


APP CRS	Rwy Ldg	11050
023°	TDZE	439
	Apt Elev	439

RNAV (RNP) Z RWY 2L
FAIRBANKS INTL (FAI) (PAFA)

RNP AR APCH - GPS. ⚠ -29°C For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.10* all Cats visibility to RVR 5500, increase RNP 0.10 all Cats visibility to RVR 5500, and increase RNP 0.30 all Cats visibility to RVR 6000.	ALSf-2 ⚠	MISSED APPROACH: Climb to 5000 on track 023° USAZY then right turn to ODIFU and track 184° to KRNL and hold. *Missed approach requires minimum climb of 222 feet per NM to 2420.
---	-------------	---

ATIS 124.4	FAIRBANKS APP CON 125.35 363.2	FAIRBANKS TOWER 118.3 257.8	GND CON 121.9	CLNC DEL 127.6
---------------	-----------------------------------	--------------------------------	------------------	-------------------

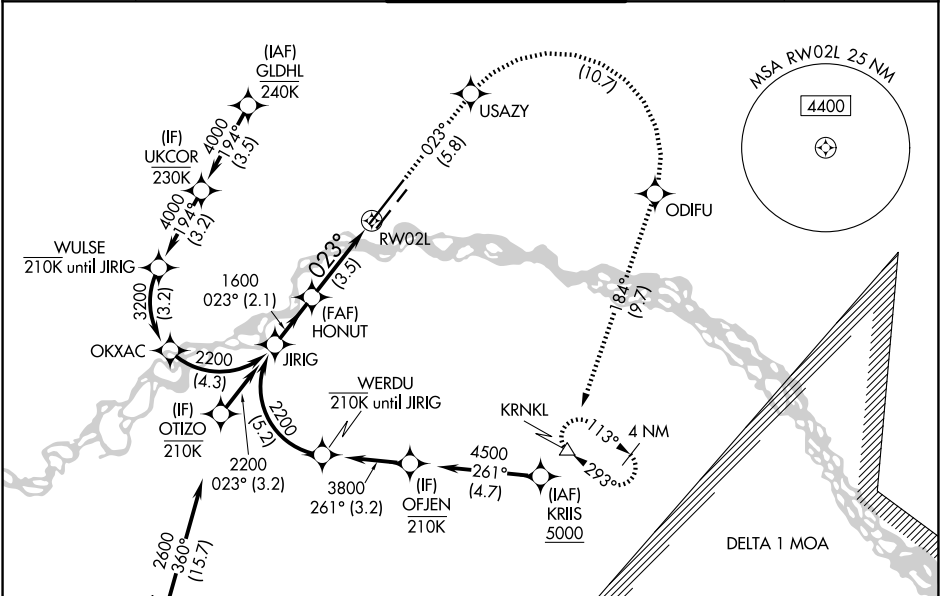

(IAF) GLOWS 5000 240K					5000 ↑ tr 023° ODIFU tr 184° KRNL				
See planview for multiple IF locations.					VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).				
JRIG 2200 GP 3.00° TCH 56					HONUT 1600 023° 1600 2.1 NM 3.5 NM RW02L				
CATEGORY		A		B		C		D	
RNP 0.10 DA*		755/24 316 (400-½)							
RNP 0.10 DA		805/35 366 (400-⅔)							
RNP 0.30 DA		855/40 416 (500-¾)							
AUTHORIZATION REQUIRED									

