


WAAS CH 81815 W07A	APP CRS 074°	Rwy Ldg 12400 TDZE 132 Apt Elev 151
--	------------------------	--

RNAV (GPS) Y RWY 7R

TED STEVENS ANCHORAGE INTL (ANC) (PANC)

RNP APCH. ▼ ▲ -21°C For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 3⁄8 SM.	ALSF-2 A MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct JUKEP and hold.
---	--

D-ATIS 135.5	ANCHORAGE APP CON 118.6 290.5	ANCHORAGE TOWER 118.3 257.8	GND CON 121.9 338.25
------------------------	---	---------------------------------------	--------------------------------

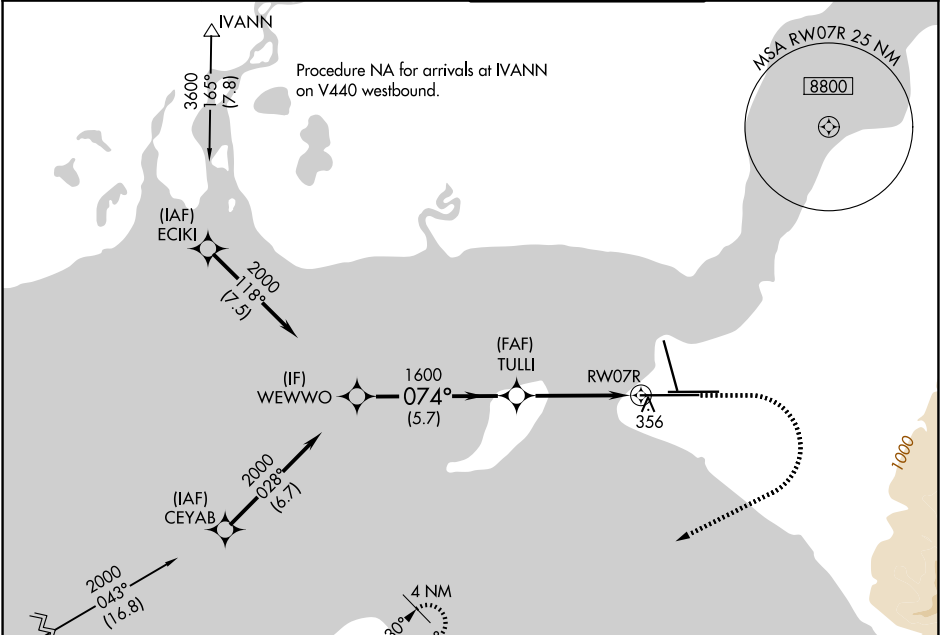

WEWWO		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).		900	3000	JUKEP
2000	074°		1600		*1.3 NM to RW07R	
GP 3.00° TCH 55	1600		*LNAV only			
5.7 NM		3.1 NM		1.3 NM		
CATEGORY	A	B	C	D		
LPV DA	332/18			200 (200-½)		
LNAV/ VNAV DA	648/55			516 (500-1)		
LNAV MDA	620/24	488 (500-½)	620/50	488 (500-1)		
CIRCLING	700-1	549 (600-1)	800-1¾ 649 (700-1¾)	920-2½ 769 (800-2½)		

<