

LOC I-ANB	APP CRS	Rwy Ldg	7002
111.5	052°	TDZE	595
		Apt Elev	612

ILS Z or LOC Z RWY 5

ANNISTON RGNL (ANB)

⚠


Circling NA north of Rwy 5-23. ADF required. When local altimeter setting not received, use Gadsden altimeter setting: increase DA to 975 and all visibilities ¼ SM; all MDAs 80 feet, and all Cat C visibilities ½ SM. For inop ALS increase S-ILS 5 all Cats visibility to 1 SM. For inop ALS when using Gadsden altimeter setting, increase S-ILS 5 all Cats visibility to 1¼ SM.

MALSR

MISSED APPROACH:

Climb to 1600 then climbing right turn to 4000 on heading 110° then on BOGGA LOM 260° course to BOGGA LOM and hold.

AWOS-3	BIRMINGHAM APP CON	CTAF	UNICOM
119.675	132.15 285.45	123.6	123.0

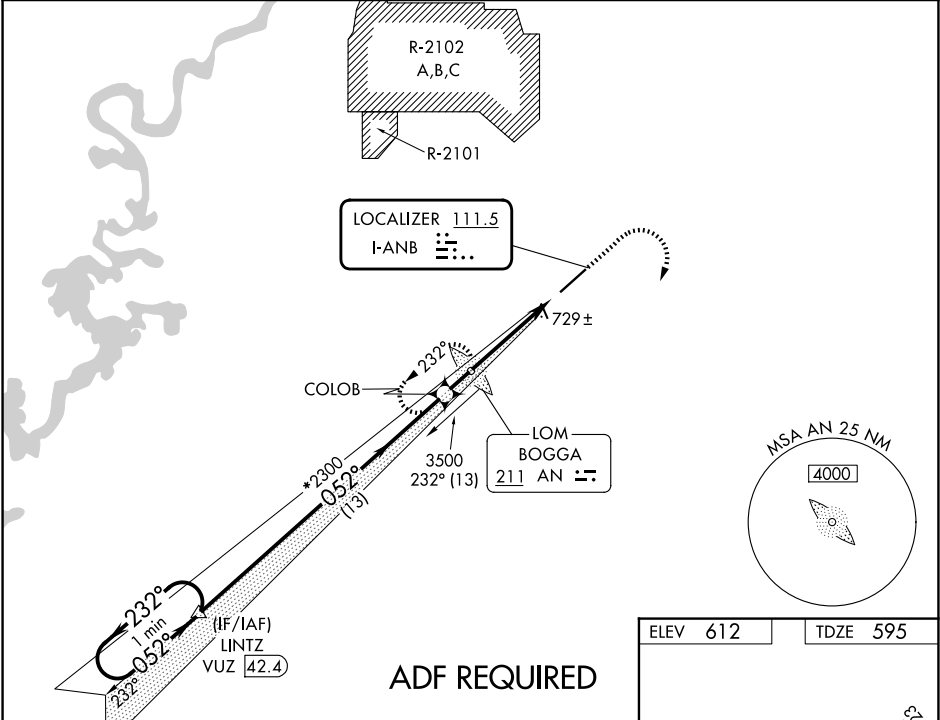

LOC restricted beyond 16° right of course.		ELEV 612	TDZE 595
One Minute Holding Pattern		1600	4000
LINTZ VUZ 42.4		AN crs 260°	BOGGA
3400 ← 232° 052° →		hdg 110°	
GS 3.00° TCH 40		* LOC only.	
COLOB		AN BOGGA LOM	
2400		*2300	
11.8 NM		1.2 NM	4.3 NM
CATEGORY	A	B	C
S-ILS 5	909-½ 314 (300-½)		
S-LOC 5	1120-½ 525 (600-½)	1120-1 525 (600-1)	NA
CIRCLING	1420-1 808 (900-1)	1420-2¼ 808 (900-2¼)	1820-3 1208 (1300-3)