

WAAS CH 77617 W09A	APP CRS 090°	Rwy Ldg TDZE 96 Apt Elev 112
--	------------------------	--

RNAV (GPS) RWY 9
ESLR RGNL (E'ST')


RNP APCH-GPS.

▼ Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase LPV DA to 331 feet; increase LNAV/VNAV DA to 644 feet and all visibility ¼ SM; increase all MDAs 40 feet and Circling visibility Cat D ¼.


▲

MISSED APPROACH: Climb to 3000 direct ILULE and hold.

ESF ASOS 119.425	MAKS APP CON 125.4 254.8	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------	---------------------------------

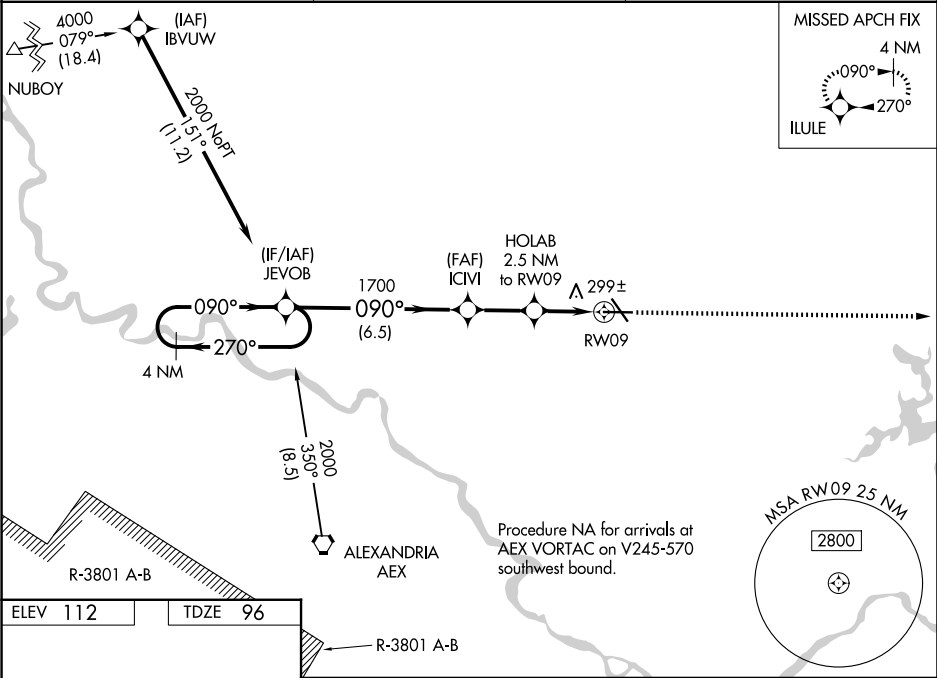

ELEV 112	TDZE 96
-----------------	----------------



4 NM Holding Pattern		JEVOB		ICVI		HOLAB 2.5 NM to RW09		RW09	
2000		270°		090°		1700		*940	
GP 3.00° TCH 53		6.5 NM		2.4 NM		1.2 NM		1.3 NM	
CATEGORY	A	B	C	D					
LPV DA	296-3¼		200 (200-¾)						
LNAV/ VNAV DA	609-1⅜		513 (500-1⅝)						
LNAV MDA	560-1 464 (500-1)		560-1⅜ 464 (500-1⅝)						
CIRCLING	600-1 488 (500-1)		740-1¾ 628 (700-1¾)				760-2 648 (700-2)		

SC-4, 06 AUG 2026 to 03 SEP 2026

SC-4, 06 AUG 2026 to 03 SEP 2026