

WAAS CH 53635 W18A	APP CRS 175°	Rwy Ldg 6080 TDZE 42 Apt Elev 46
--	------------------------	---

RNAV (GPS) RWY 18
CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to $\frac{3}{4}$ SM, all LNAV/VNAV visibilities to $\frac{7}{8}$ SM, and LNAV Cat C, D, and E visibility to $1\frac{3}{4}$ SM.

MALSR



MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct SOLON and hold.

ATIS 126.8	CORPUS APP CON 120.9 348,725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15
---------------	---------------------------------	-----------------------------	-------------------------

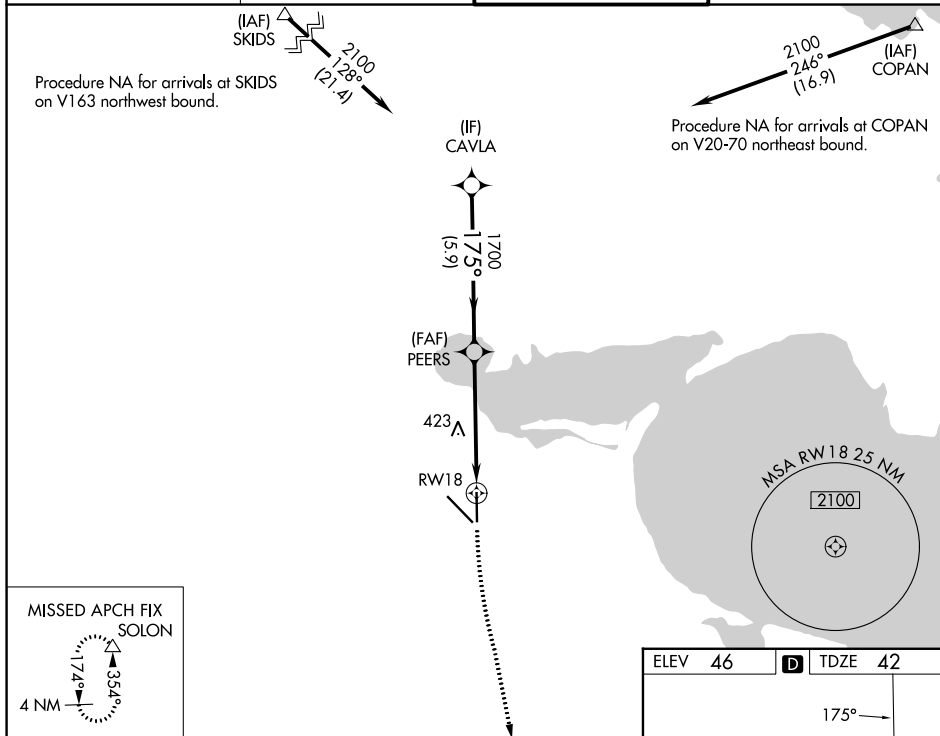

CAVLA

2100

175°

GP 3.00°
TCH 50

1700

PEERS

1700

1.8 NM to
RW18

RW18

5.9 NM

3.3 NM

1.8 NM

500

2000

SOLON

△

CATEGORY	A	B	C	D	E
LPV DA	242-1/2		200 (200-1/2)		
LNAV/ VNAV DA	345-1/2		303 (300-1/2)		
LNAV MDA	660-1/2	618 (700-1/2)	660-1 3/8		618 (700-1 3/8)
CIRCLING	660-1 614 (700-1)	780-1 734 (800-1)	820-2 1/4 774 (800-2 1/4)	820-2 1/2 774 (800-2 1/2)	820-2 3/4 774 (800-2 3/4)

