
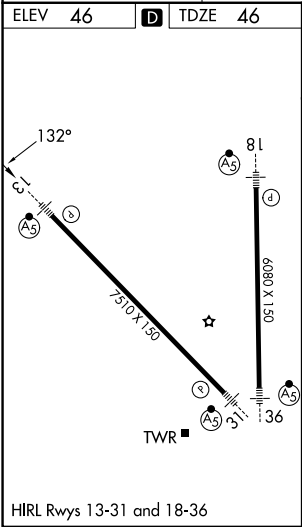


WAAS CH 97515 W13A	APP CRS 132°	Rwy Ldg TDZE Apt Elev	7510 46 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 13
CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct SOLON and hold.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C, D, and E visibility to RVR 5500. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15
----------------------	--	------------------------------------	--------------------------------

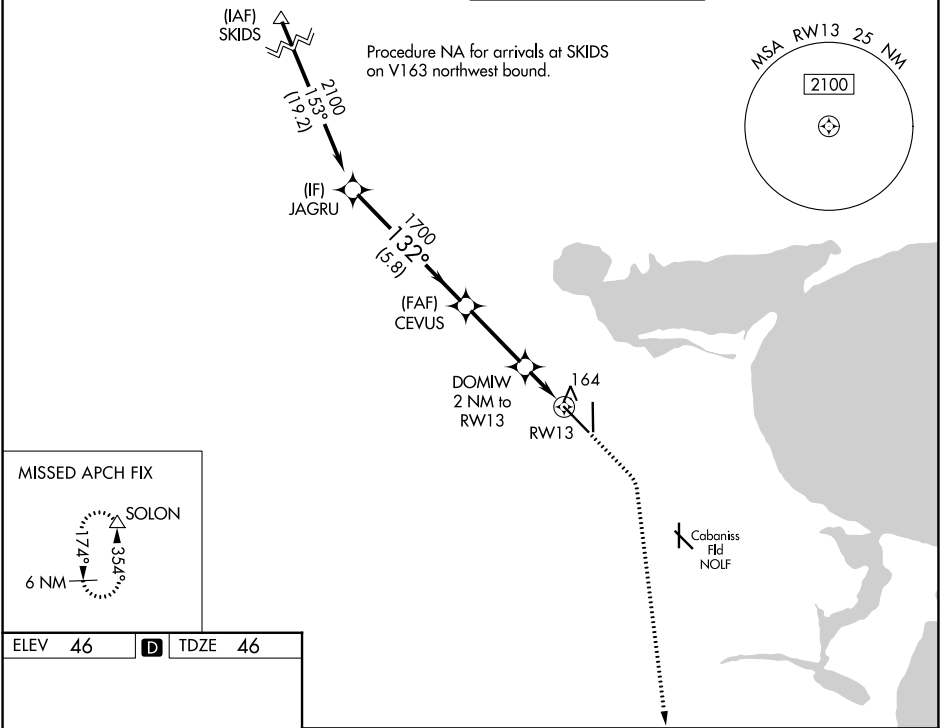

JAGRU CEVUS DOMIW 2 NM to RW13 1 NM to RW13 RW13					500 2000	SOLON △
GP 3.00° TCH 50 2100 132° 1700 720	5.8 NM 3 NM 1 NM 1 NM					
CATEGORY	A	B	C	D	E	
LPV DA *	246/24 200 (200-½)					
LNAV/VNAV DA	325/24 279 (300-½)					
LNAV MDA	420/24	374 (400-½)	420/35	374 (400-¾)		
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)	