

WAAS CH 69617 W36A	APP CRS 355°	Rwy Ldg TDZE Apt Elev	6080 40 46
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 36
CORPUS CHRISTI INTL (CRP)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all
A Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000.
*RVR 1800 authorized with use of FD or AP or HUD to DA.



MALSR




MISSED APPROACH: Climb to 2000 direct FEKL and on track 304° to ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15
----------------------	--	------------------------------------	--------------------------------

MISSED APCH FIX

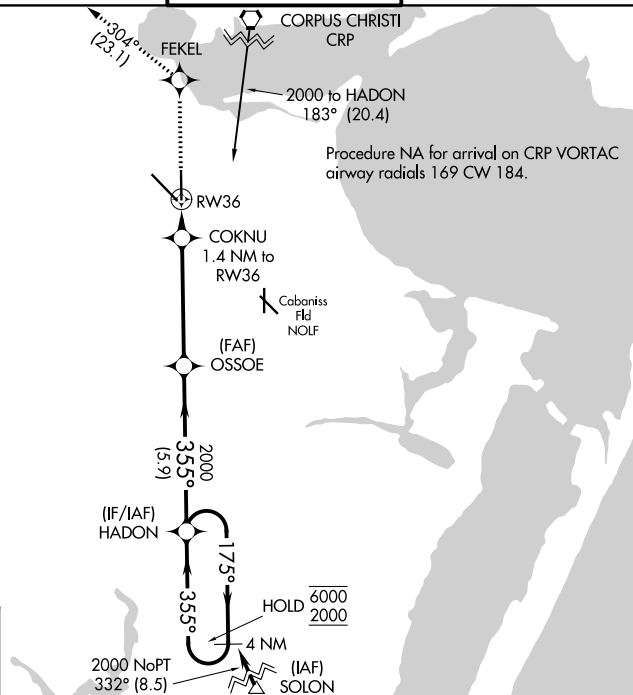

ELEV	46	D	TDZE	40
------	----	----------	------	----

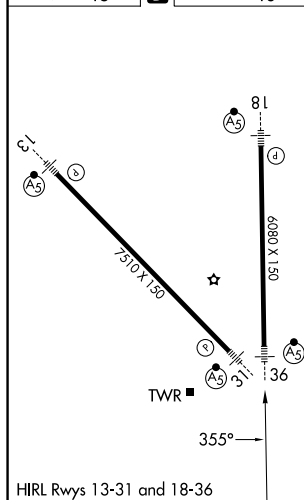

2000 ↑	FEKEL ✦	tr 304°	ATHIS △	OSSOE 2000	HADON 4 NM Holding Pattern
CATEGORY	A	B	C	D	E
LPV DA*	240/24		200 (200-½)		
INAV/ VNAV	356/24		316 (400-½)		
INAV MDA	440/24 400 (400-½)		440/35 400 (400-¾)		
CIRCLING	500-1 454 (500-1)	780-1 734 (600-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)