

WAAS
CH **99413**
W18A

APP CRS
179°

Rwy Ldg **6143**
TDZE **8**
Apt Elev **9**

RNAV (GPS) RWY 18

HOUMA-TERREBONNE (HUM)

RNP APCH - GPS.

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using MSY altimeter setting. When local altimeter setting not received, use MSY altimeter setting and increase LPV DA to 286 feet; increase LNAV/VNAV DA to 517 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MALSR

MISSED APPROACH:

Climb to 1900 direct ITIWE and hold.

ATIS 120.25	NEW ORLEANS APP CON 118.9 350.35	HOUMA TOWER ★ 125.3 (CTAF) 0 346.3	GND CON 123.875	UNICOM 122.95
-----------------------	--	--	---------------------------	-------------------------

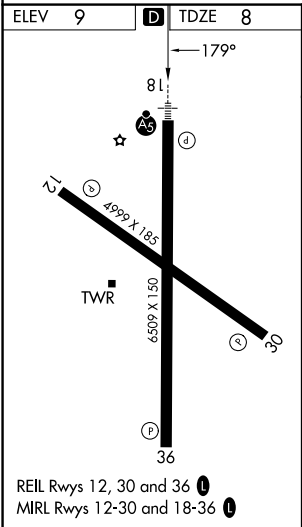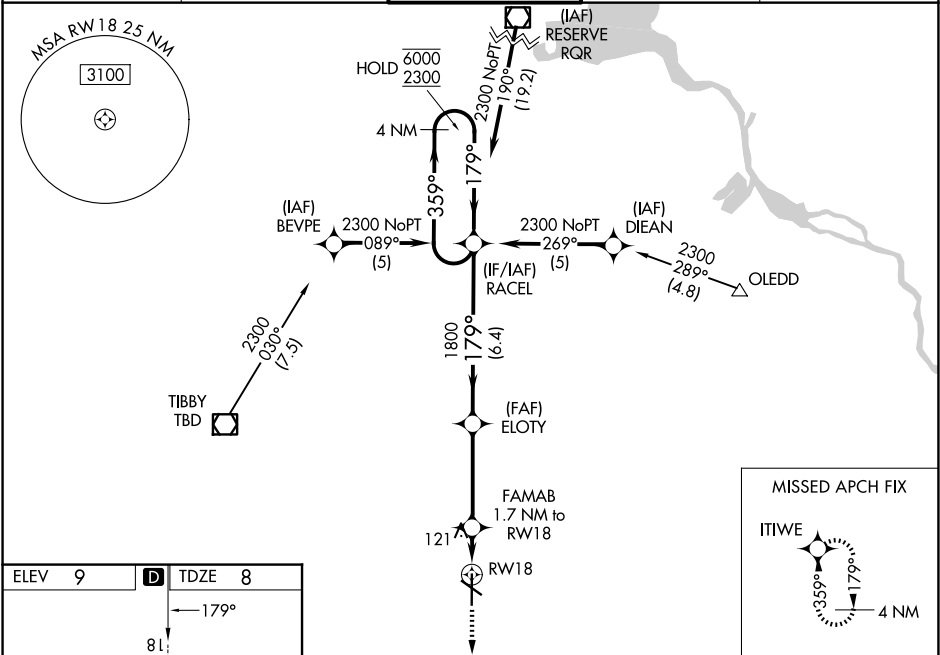

1900	ITIWE	RACEL 4 NM Holding Pattern			