

HI-VOR or TACAN RWY 36

VORTAC SZW 117.5 Chan 122	APCH CRS 353°	Rwy Idg TDZE 62 Arpt Elev 83
[USAF]		

Tallahassee Intl (KTLH)


DME required. RADAR required for procedure entry.

When ALS inop, increase CAT E RVR 60, vis to 1 1/2 miles.





MISSED APPROACH: Climb to 4000 direct SZW VORTAC then on R-288 to QUILL (SZW R-288/11.8 DME) and hold.


ATIS 119.45 239.25	Tallahassee App Con 135.8 317.4	Tallahassee Tower ★ 118.7 (CTAF) 0257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	ASR
-----------------------	------------------------------------	--	------------------------	--------------------------	-----

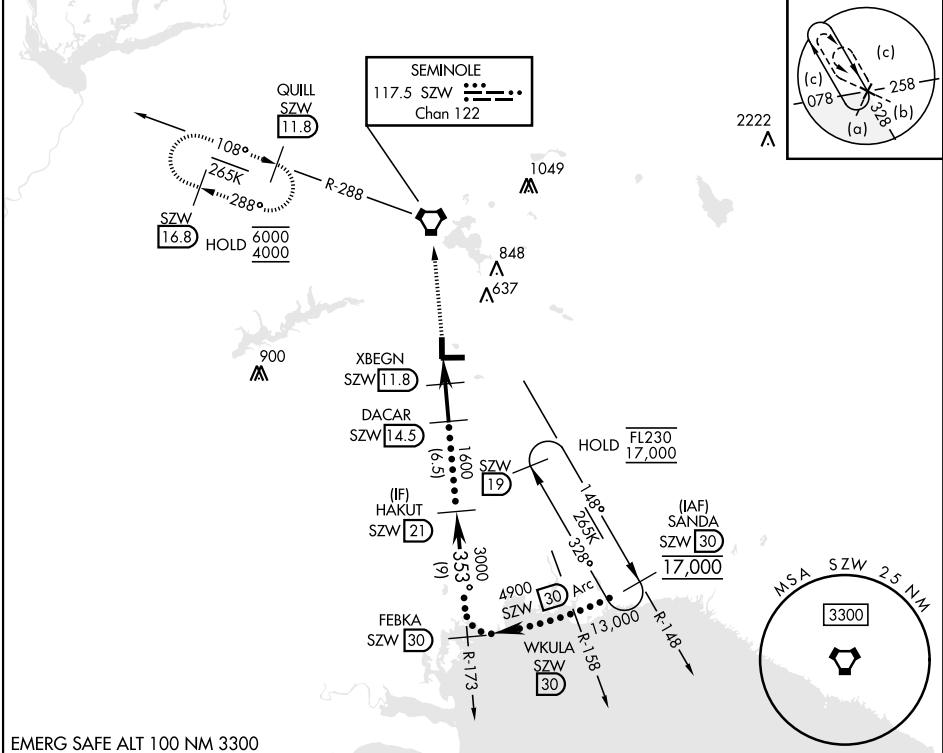

EMERG SAFE ALT 100 NM 3300

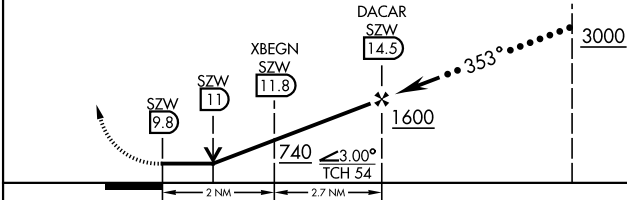

CATEGORY	C	D	E
S-36 *	460/35	398 (400-%)	
CIRCLING	640-1 1/2 557 (600-1 1/2)	800-2 1/4 717 (800-2 1/4)	1000-3 917 (1000-3)

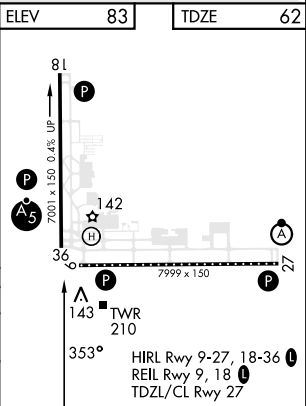

HI-VOR or TACAN RWY 36