


LOC/DME I-PLQ 111.9 Chan 56	APP CRS 274°	Rwy Ldg TDZE 58 Apt Elev 83
---	------------------------	---

ILS or LOC RWY 27


TALLAHASSEE INTL (TLH)

DME required.	ALSF-2	MISSED APPROACH: Climb to 2000 then climbing right turn to 4000 on heading 092° and on SZW VORTAC R-140 to GACED INT/SZW 12.4 DME and hold, continue climb-in-hold to 4000.
For inop ALS, increase S-ILS 27 Cat E visibility to RVR 4000 and S-LOC 27 Cat E visibility to 2 SM.		
ASR		

ATIS 119.45 239.25	TALLAHASSEE APP CON ★ 135.8 317.4	TALLAHASSEE TOWER ★ 118.7 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 123.075
------------------------------	---	--	-------------------------------	--------------------------

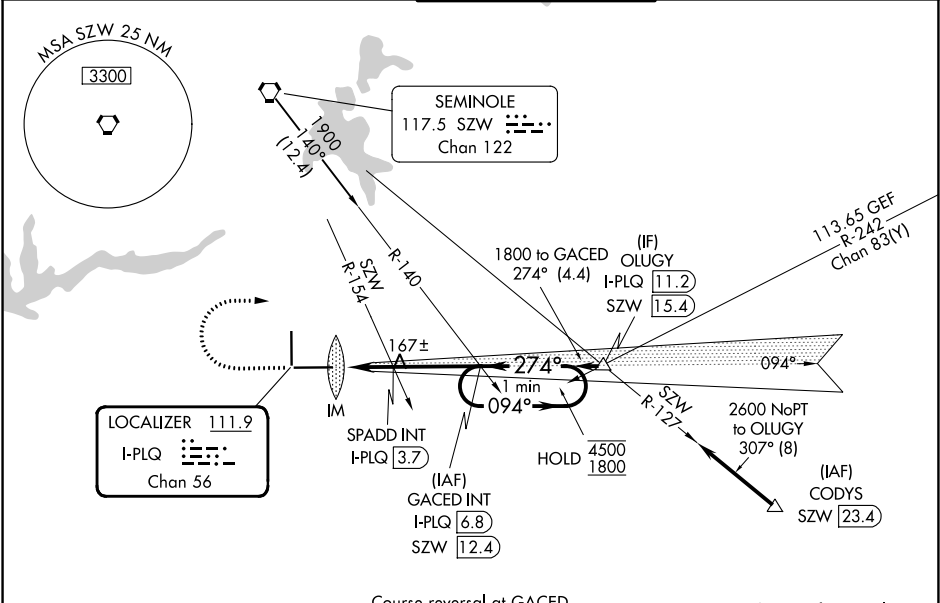

ELEV 83	TDZE 58
----------------	----------------



TDZL/RCLS Rwy 27	REIL Rws 9 and 18	HIRL Rws 9-27 and 18-36
FAF to MAP 5.3 NM		
Knots	60	90 120 150 180
Min:Sec	5:18	3:32 2:39 2:07 1:46