

LOC/DME I-LHJ 111.55 Chgn 52 (Y)	APP CRS 201°	Rwy Ldg 8000 TDZE 871 Apt Elev 871
--	------------------------	---

ILS or LOC RWY 20

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

ADF or DME or RADAR required for LOC only.
RADAR required for procedure entry at OLIDE.

▼ VDP NA when using PIA altimeter setting. When local altimeter setting not received, use PIA altimeter setting: increase S-ILS 20 DA to 1187 feet and all visibilities to RVR 2400; increase all MDAs 120 feet and S-LOC 20 visibility Cats C and D to RVR 5500 and Circling visibility Cats C and D $\frac{1}{2}$ SM. For Inop ALS when using PIA altimeter setting, increase S-ILS 20 all Cats visibility to RVR 4500 and S-LOC 20 Cats C and D visibility to $1\frac{1}{2}$ SM.





ALSF-2



MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 279° and SPI VORTAC R-037 to MCLN INT/PIA 34.2 DME and hold, continue climb-in-hold to 3000.

ATIS 119.575	SAINT LOUIS APP CON 128.725 256.9	BLOOMINGTON TOWER ★ 124.6 (CTAF) 0 269.575	GND CON 121.65	UNICOM 122.95
-----------------	--------------------------------------	---	-------------------	------------------

ALTERNATE
MISSED APCH FIX

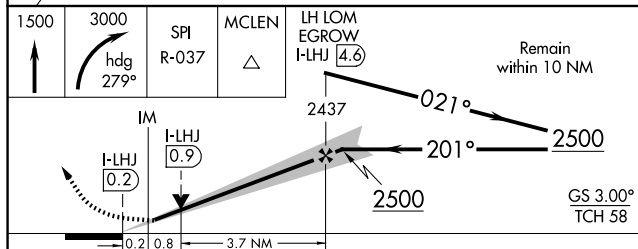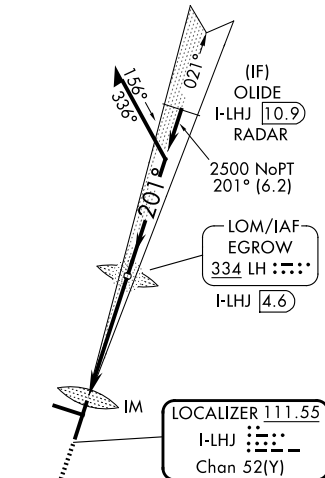

CATEGORY	A	B	C	D
S-ILS 20	1071/18 200 (200-½)			
S-LOC 20	1260/24	389 (400-½)	1260/35	389 (400-½)
CIRCLING	1340-1	469 (500-1)	1620-2¼ 749 (800-2¼)	1620-2½ 749 (800-2½)

