


WAAS CH 93702 W06A	APP CRS 057°	Rwy Ldg TDZE Apt Elev	7201 2351 2351
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6

GENERAL WM J FOX AIRFIELD (WJT)

RNP APCH - GPS.				
	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA when using PMD altimeter setting. When local altimeter setting not received, use PMD altimeter setting and increase LPV DA to 2646 feet, increase LNAV/VNAV DA to 2694 feet, increase all MDAs 60 feet, and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM.		MISSED APPROACH: Climb to 6000 direct SISOY and on track 091° to ETHER and hold.	
	ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER★ 118.525 (CTAF) 256.9	GND CON 121.7 256.9
			UNICOM 122.95	

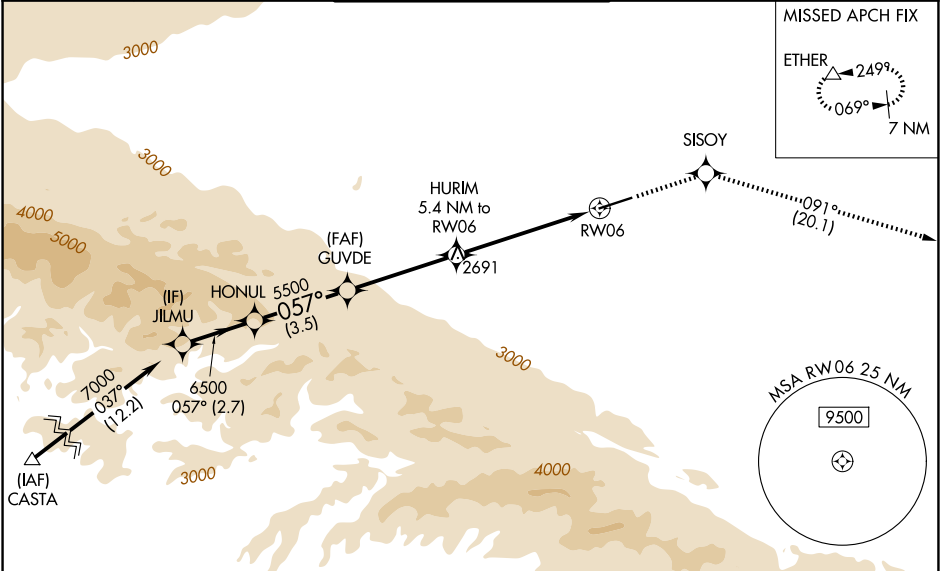

JILMU		HONUL		GUVDE		HURIM		SISOY		tr		ETHER	
7000		6500		5500		4100		6000		091°		△	
GP 3.00°		TCH 40											
2.7 NM		3.5 NM		4.1 NM		3.7 NM		1.7 NM					
CATEGORY		A		B		C		D					
LPV DA		2601-1		250 (300-1)									
LNAV/VNAV DA		2649-1		298 (300-1)									
LNAV MDA		2940-1		589 (600-1)		2940-1¾		589 (600-1¾)					
CIRCLING		2940-1		589 (600-1)		3120-2¼		769 (800-2¼)		3120-2½		769 (800-2½)	
										REIL Rwy 6 and 24			
										MIRL Rwy 6-24			