

LOC I-SKC 109.5	APP CRS 103°	Rwy Ldg TDZE Apt Elev	5849 901 912
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 10

WAUKESHA COUNTY (U/S)

RADAR required for procedure entry.

▼



▲


For inop ALS, increase S-LOC 10 visibility to 1½ SM. When local altimeter setting not received, use MWC altimeter setting and increase S-ILS 10 DA to 1149 feet; increase all MDAs 60 feet and S-LOC 10 visibility Cats C and D ½ SM, and Circling visibility Cats C and D ¼ SM.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2800 direct BAE VOR/DME and hold, continue climb-in-hold to 2800.

ATIS 118.875	MILWAUKEE APP CON 125.35 307.0	WAUKESHA TOWER ★ 123.7 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

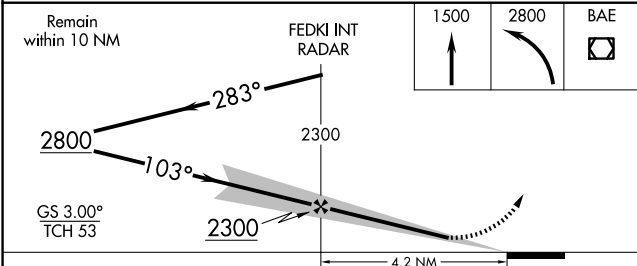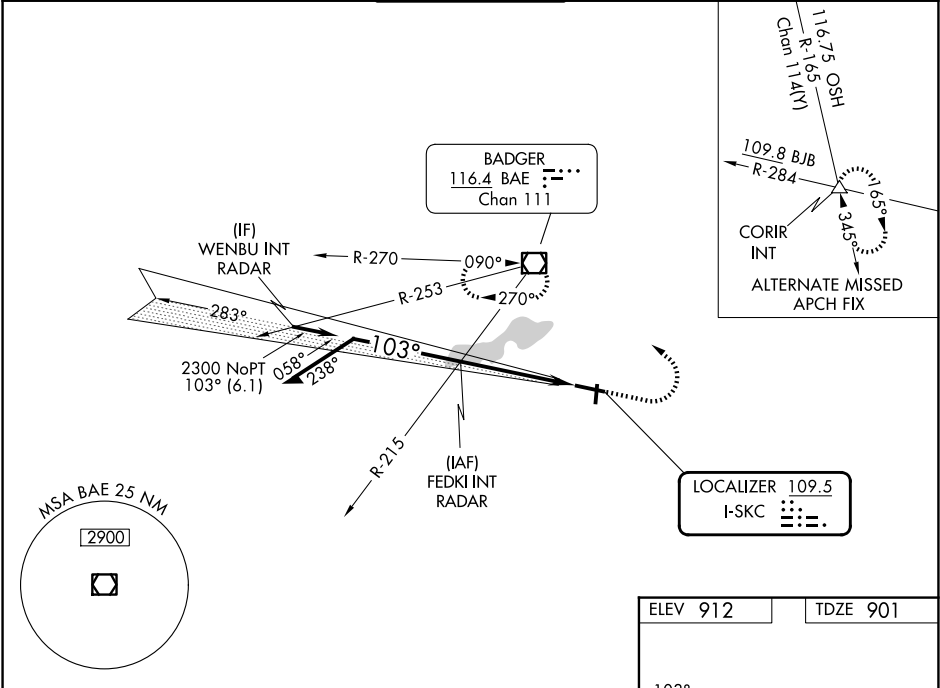

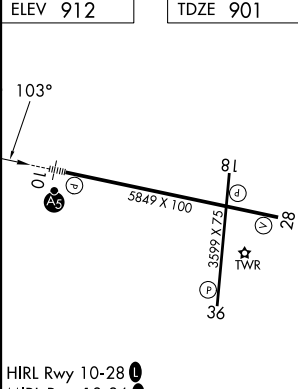ELEV 912	TDZE 901				
					
HIRL Rwy 10-28 L					
MIRL Rwy 18-36 L					
REIL Rwy 28 L					
REIL Rws 18 and 36					
FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026